


PT6305 Series

**3 AMP HIGH-PERFORMANCE
ADJUSTABLE ISR**

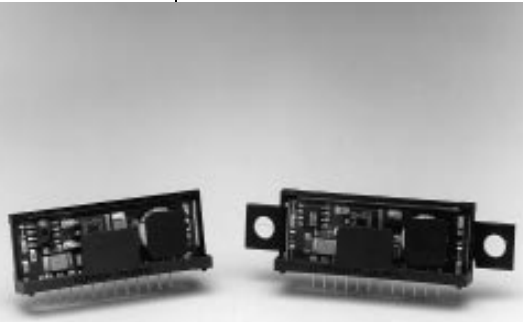


- Single-Device 5V to 3V Power
- 85% Efficiency
- Small SIP Footprint:
0.36" x 2.00" x 0.60"(H)
- Wide Input Voltage Range:
+4.5V to +9.0V
- Internal Short Circuit Protection
- Over-Temperature Protection

The PT6305N is Power Trends' new high performance +5V to +3.3V, 3

Amp, 12-Pin SIP (Single In-line-Package) Integrated Switching Regulator (ISR). This high-performance ISR allows easy integration of low-power 3.3V logic IC's into existing 5V systems without redesigning the central power supply. Only one external capacitor is required for proper operation. The PT6306,7,8 can be used to power high-speed data buses (+2.1V), or the new GTL (+1.2V) logic buses.


Standard Application

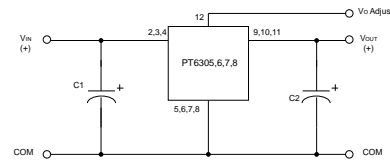

C₁ = Optional electrolytic (100µF)
C₂ = Required 100µF electrolytic (No tantalum)
See capacitor application note on page 43.

Pin-Out Information

Pin No.	Function	Pin No.	Function
1	N/C	7	GND
2	V _{in}	8	GND
3	V _{in}	9	V _{out}
4	V _{in}	10	V _{out}
5	GND	11	V _{out}
6	GND	12	Adjust (See page 40.)



Ordering Information

- PT6305□ = +3.3 Volts
- PT6306□ = +1.8 Volts
- PT6307□ = +2.1 Volts
- PT6308□ = +1.2 Volts
(For dimensions, see page 66.)

PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Tab Configuration	
	None	Side
Vertical Through-Hole	N	R
Horizontal Through-Hole	A	G
Horizontal Surface Mount	C	B

(See Thermal Application Notes on page 44 for heat tab application data.)

Specifications

Characteristics (T _a =25°C unless noted)	Symbols	Conditions	PT6305 SERIES				
			Min	Typ	Max	Units	
Output Current	I _o	4.5 ≤ V _{in} ≤ V _{in} MAX	0.3	—	3.0**	ADC	
Current Limit	I _{cl}	V _{in} = +5V	—	3.6	5.0	ADC	
Short Circuit Current	I _{sc}	V _{in} = +5V	—	5.0	—	Apk	
Input Voltage Range	V _{in}	0.3A ≤ I _o ≤ 3.0A	PT6305N PT6306N PT6307N PT6308N	4.5 4.5 4.5 4.5	— — — —	9 9 9 6.0	VDC VDC VDC VDC
Static Voltage Tolerance	V _o	V _{in} = +5V, I _o = 3.0A 0°C ≤ T _a ≤ +70°C	PT6305N PT6306N PT6307N PT6308N	3.2 1.7 2.0 1.1	3.3 1.8 2.1 1.2	3.4 1.9 2.2 1.3	VDC VDC VDC VDC
Line Regulation	Reg _{line}	4.5V ≤ V _{in} ≤ 5.5V, I _o = 3.0A	—	±25	±50	—	mV
Load Regulation	Reg _{load}	V _{in} = +5V, 0.3 ≤ I _o ≤ 3.0A	—	±25	±50	—	mV
V _o Ripple/Noise pk-pk	V _n	V _{in} = 5V, I _o = 3.0A	—	66	—	—	mV
Transient Response with C ₂ = 100µF	t _{tr} V _{os}	I _o step between 1.5A and 3.0A V _o over/undershoot	— —	200 200	— —	— —	µSec mV
Efficiency	η	V _{in} = +5V, I _o = 1.5A	PT6305N PT6306N PT6307N PT6308N	— — — —	85 74 77 63	— — — —	% % % %
		V _{in} = +5V, I _o = 3.0A	PT6305N PT6306N PT6307N PT6308N	— — — —	80 68 72 57	— — — —	% % % %
Switching Frequency	f _o	4.5 ≤ V _{in} ≤ V _{in} MAX 0.3A ≤ I _o ≤ 3.0A	—	500	650	800	KHz
Operating Temperature	T _a	Free Air Convection (40-60 LFM) Over V _{in} and I _o Ranges	—	0	—	+70*	°C
Thermal Resistance	θ _{ja}	Free Air Convection (40-60 LFM)	—	25	—	—	°C/W
Storage Temperature	T _s	—	—	-40	—	+125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 Condition A, 1 msec, Half Sine, mounted to a fixture	—	—	—	500	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2 Condition A, 20-2000 Hz	—	—	—	15	G's
Weight	—	—	—	—	11.2	—	grams
Relative Humidity	—	Non-condensing	—	0	—	95	%


*See Thermal Derating chart. **The PT6305 Series can be easily paralleled to provide output current in multiples of 3 amps. Please contact a Power Trends' Application Engineer for the appropriate application note. **Note:** The PT6305 Series requires a 100µF electrolytic capacitor for proper operation in all applications.

CHARACTERISTIC DATA


PT6305, 3.3 VDC

(See Note 1)

Efficiency vs Output Current

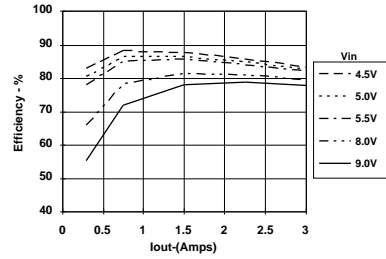


Ripple vs Output Current

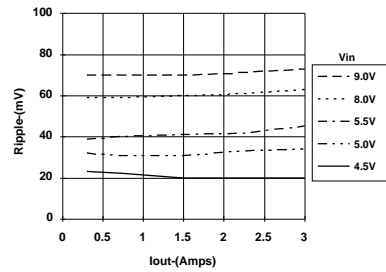


Minimum Input Voltage

(See Note 2)

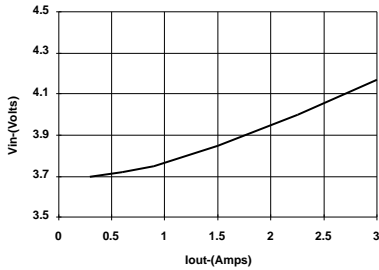


Thermal Derating (Ta)

(See Note 3)

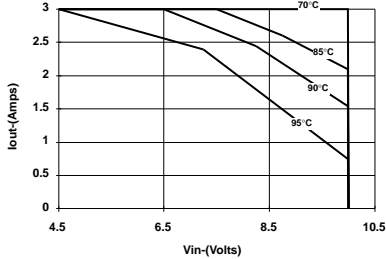


Power Dissipation vs Output Current

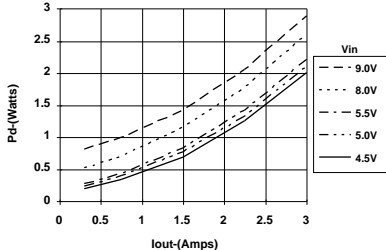


PT6307, 2.1 VDC

(See Note 1)

Efficiency vs Output Current

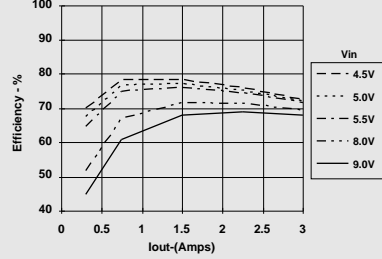


Ripple vs Output Current

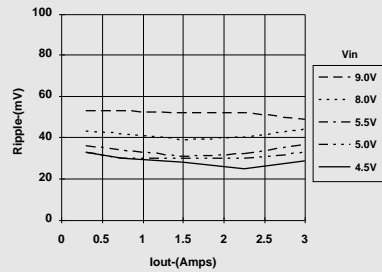


Minimum Input Voltage

(See Note 2)

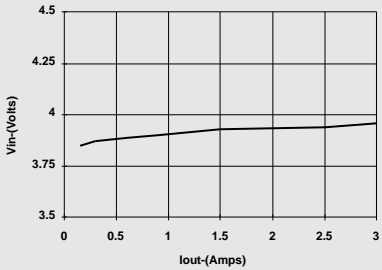


Thermal Derating (Ta)

(See Note 3)

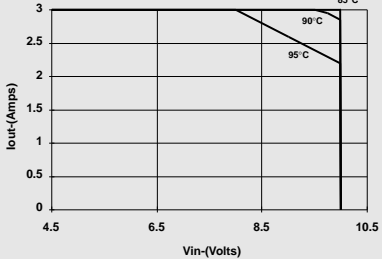


Power Dissipation vs Output Current

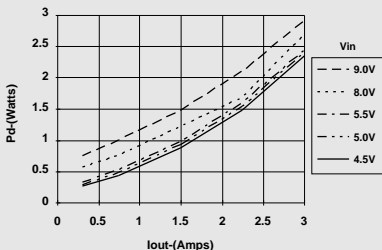


PT6308, 1.2 VDC

(See Note 1)

Efficiency vs Output Current

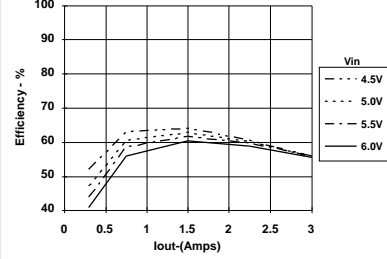


Ripple vs Output Current

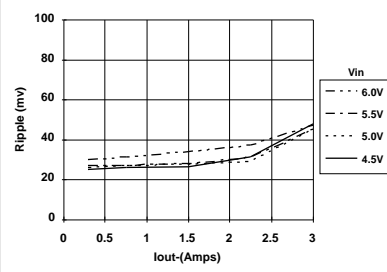


Minimum Input Voltage

(See Note 2)

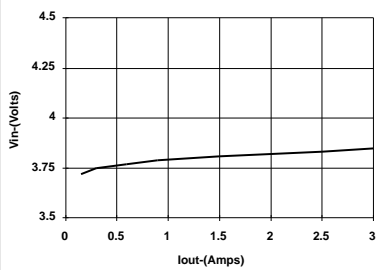


Thermal Derating (Ta)

(See Note 3)

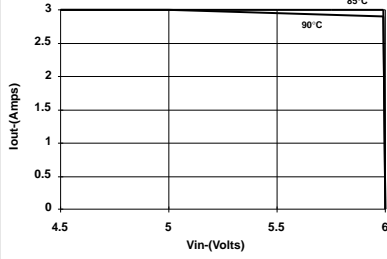

Power Dissipation vs Output Current

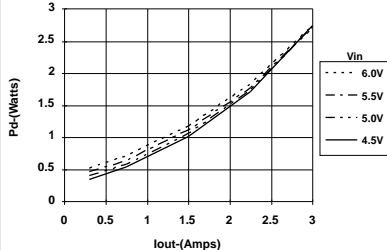

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Note 2: Minimum Vin data is typical and is not guaranteed. The data corresponds to a 2% output voltage drop.


Note 3: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM with no optional heat tab soldered in a printed circuit board. (See Thermal Application Notes).

Package Style 300
Suffix A, C, D, E, N, P


PACKAGE INFORMATION AND DIMENSIONS

Revised 2/11/2000


Vertical Through-Hole Mount (Suffix N & P)

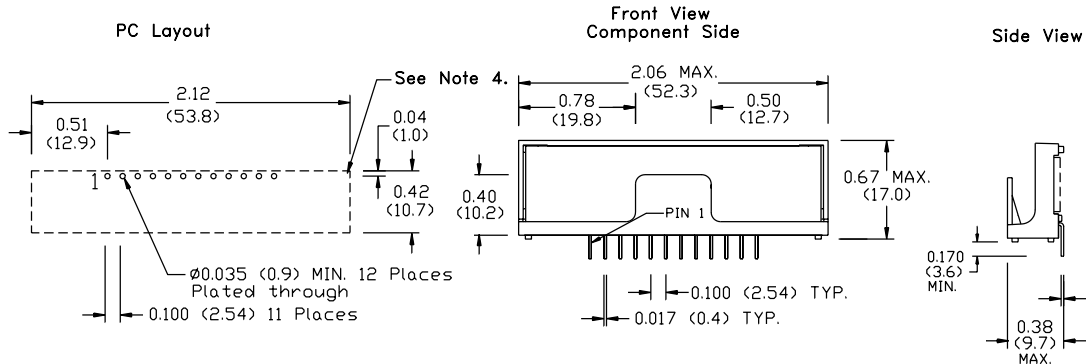

Horizontal Through-Hole Mount (Suffix A & D)

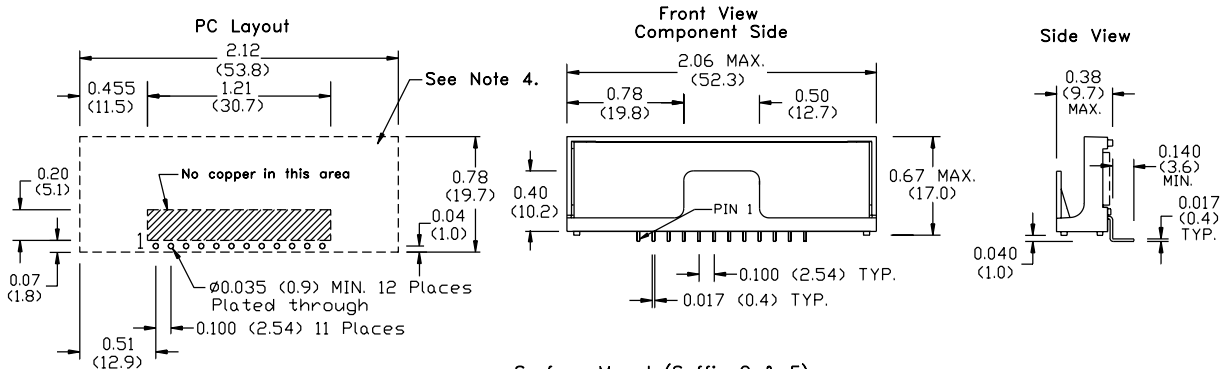

Surface Mount (Suffix C & E)

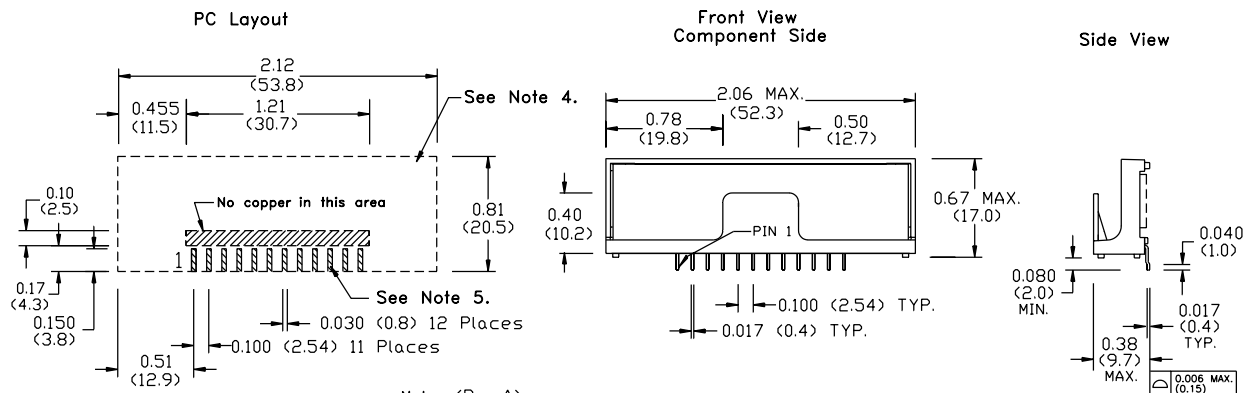

Notes: (Rev.A)

- 1: All dimensions are in inches (mm).
- 2: 2 place decimals are ± 0.30 (± 0.8 mm).
- 3: 3 place decimals are ± 0.10 (± 0.3 mm).
- 4: Recommended mechanical keep out area.
- 5: Power pin connections should utilize two or more vias per input, ground and output pin.

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
PT6305A	NRND	SIP MODULE	ECA	12		TBD	Call TI	Call TI	
PT6305B	NRND	SIP MODULE	ECK	12	12	TBD	Call TI	Level-1-215C-UNLIM	
PT6305C	NRND	SIP MODULE	ECC	12	12	TBD	Call TI	Level-1-215C-UNLIM	
PT6305N	NRND	SIP MODULE	ECD	12	12	TBD	Call TI	Level-1-215C-UNLIM	
PT6305R	NRND	SIP MODULE	ECE	12		TBD	Call TI	Call TI	
PT6306A	NRND	SIP MODULE	ECA	12		TBD	Call TI	Call TI	
PT6306B	NRND	SIP MODULE	ECK	12		TBD	Call TI	Call TI	
PT6306C	NRND	SIP MODULE	ECC	12		TBD	Call TI	Call TI	
PT6306G	NRND	SIP MODULE	ECG	12		TBD	Call TI	Call TI	
PT6306R	NRND	SIP MODULE	ECE	12		TBD	Call TI	Call TI	
PT6308A	NRND	SIP MODULE	ECA	12	12	TBD	Call TI	Level-1-215C-UNLIM	

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated