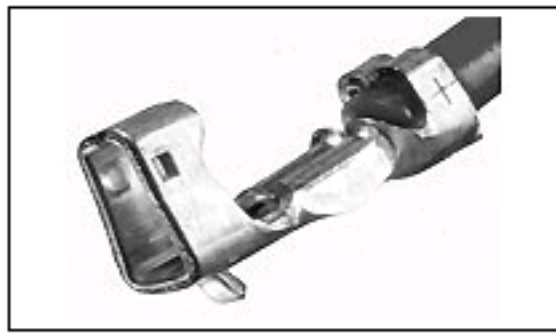


353907-1 Product Details

[Share](#) | [Print](#) | [Email](#)


353907-1

TE Internal Number: 353907-1
✔ Active

[View 3D PDF](#)

1.5mm AMP Mini CT Connectors

✔ Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Wire-to-Board, Wire-to-Board / Wire-to-Wire / Wire-to-Panel, Wire-to-Panel, Wire-to-Wire
- Applies To Wire/Cable
- Contact
- Contact Type = Socket
- Wire/Cable Size = 24 - 28 AWG

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [View Housings \(38\)](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)


Documentation & Additional Information

Product Drawings:

- [AMP MINI COMMON TERMINATED \(CT\) CONNECTOR 1.5mm PIT... \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [AMP Mini Common Termination \(CT\) Connector 1.5mm Pit... \(PDF, English\)](#)
- [1.5MM PITCH SIGNAL MATE CONNECTOR \(PDF, Japanese\)](#)
- [AMP Mini CT Connector 1.5mm Pitch \(Crimp Type\), Lead... \(PDF, Japanese\)](#)

Application Specifications:

- [AMP MINI COMMON TERMINATION \(CT\) CONNECTOR, 1.5MM PI... \(PDF, English\)](#)

Instruction Sheets:

- [1.5mm Pitch Mini CT DC Drawer Connector SF Type \(PDF, Japanese\)](#)
- [1.5mm Pitch Mini CT Hybrid Drawer Connector SF Type \(PDF, Japanese\)](#)
- [1.5mm Pitch Mini CT Hybrid Drawer Connector Slim Type \(PDF, Japanese\)](#)

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version J\)](#)
- [3D Model \(IGES, Version J\)](#)
- [3D Model \(STEP, Version J\)](#)

Related Products:

- [Tooling](#)
- [Housings \(38\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Contact
- Termination Method to Wire/Cable = Crimp
- UL File Number = E28476
- CSA File Number = LR 7189-133

Electrical Characteristics:

- Contact - Rated Current (A) = 2
- Operating Voltage Reference = AC/DC, AC, DC
- Operating Voltage (VAC) = 50
- Operating Voltage (VDC) = 50

Termination Features:

- Wire/Cable Size (AWG) = 24 - 28

Contact Features:

- Contact Type = Socket
- Contact Plating, Mating Area, Material = Pre-Tin
- Contact Plating, Mating Area, Thickness (µm [µin]) = 0.2 [7.87]

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- Agency/Standard = CSA, UL

Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 0.85 - 1.05 [0.0334 - 0.041]

Operation/Application:

- Application Use = Wire-to-Board, Wire-to-Board / Wire-to-Wire / Wire-to-Panel, Wire-to-Panel, Wire-to-Wire
- Contact Transmits (Typical Application) = Signal (Data)
- Pick and Place Cover = Without

Packaging Features:

- Packaging Method = Strip

Other:

- Brand = AMP

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference Products](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address 

