


1058644-1 Product Details

[Live Product Chat](#)

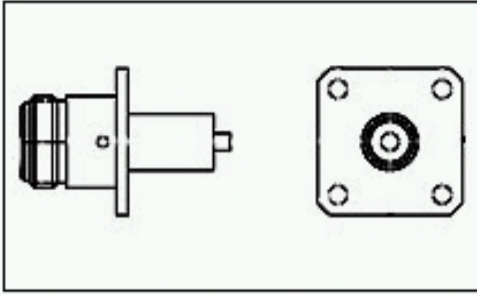

1058644-1

TE Part Number: 1058644-1

[Active](#)

[Add to Part List](#)

N Series RF Connectors

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector
- Jack
- Terminate To Printed Circuit Board
- Body Style = Straight
- Commercial Grade

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [OSN STRAIGHT 4 HOLE FLANGE MOUNT HF JACK RECEPTACLE \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- [Gender](#) = Jack
- [Body Style](#) = Straight
- [Grade](#) = Commercial
- [Lightning/EMP Protection](#) = None
- [Dielectric Material](#) = TFE Fluorocarbon
- [Weatherproof](#) = No
- [Body Material](#) = Stainless Steel
- [Terminal Type](#) = Straight

Mechanical Attachment:

- [Panel Attachment](#) = With
- [Panel Attachment Method](#) = Square Flange
- [Panel Attachment Style](#) = Front Mount

Electrical Characteristics:

- [Connector Impedance \(Ω\)](#) = 50

Body Related Features:

- [Body Plating](#) = Passivated

Contact Related Features:

- [Center Contact Plating](#) = Gold
- [Center Contact Material](#) = Beryllium Copper

Housing Related Features:

- [Captured Center Contact](#) = With

Industry Standards:

- [Government/Industry Qualification](#) = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin-in-Paste capable to 245°C, Pin-in-Paste capable to 260°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- [Terminate To](#) = Printed Circuit Board

Other:

- [Brand](#) = AMP