


Product Details for 033 - 0053 - 0001

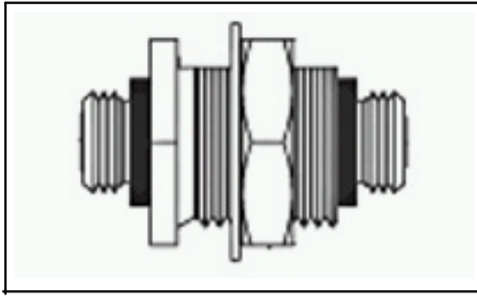

033 - 0053 - 0001

Tyco Part Number: 1466295 - 1

[Active](#)

SMB RF Connectors

[RoHS Compliant \(Statement of Compliance\)](#)

Product Highlights:

- ? Adapter
- ? Jack
- ? Miniature
- ? Adapter Type = SMB Jack - Jack Feed - Thru
- ? Coupler Style = Threaded

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [ADAPTER,BULKHEAD FEED-THRU](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Adapter
- ? [Gender](#) = Jack
- ? Connector Series = Miniature
- ? [Adapter Type](#) = SMB Jack - Jack Feed - Thru
- ? [Body Style](#) = Straight
- ? [Grade](#) = Commercial
- ? Safety Wire Holes = Without
- ? Body Material = Brass
- ? Dielectric Material = TEFLON

Mechanical Attachment:

- ? [Panel Attachment](#) = With
- ? [Panel Attachment Style](#) = Rear Mount
- ? Panel Attachment Method = Lockwasher and Nut

Electrical Characteristics:

- ? [Connector Impedance \(?\)](#) = 50
- ? Environmental Seal = Without
- ? Hex Head Size (Across Flats) (mm [in]) = 9.53 [0.375]

Body Related Features:

- ? Coupler Style = Threaded
- ? [Pin Protection](#) = Without
- ? [Body Plating](#) = Silver
- ? Overall Length (mm [in]) = 15.24 [0.600]
- ? Mates With = 50 Ohm Screw - On (S - 50)

Contact Related Features:

- ? [Center Contact Plating](#) = Gold per MIL - G-45204, Type II, Grade C, Class 1
- ? Contacts = With

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin -in -Paste capable to 245°C, Pin in -Paste capable to 260°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- ? Brand = Microdot