




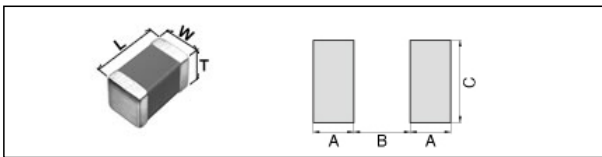


GLF1608T2R2M

Applications	 Commercial Grade
Feature	 Wire Wound
	 Magnetic Shield
	 No Directivity
	 Ferrite Core
Series	GLF Series / GLF1608 Type
Status	OBSL(Recommended Alternate Part Number:MLZ1608A2R2WT000) Discontinue Issue Date: Apr.27, 2011 Last Purchase Order Date: Jun.30, 2012 Last Shipment Date: Sep.30, 2012



Size	
Length(L)	1.60mm Nom.
Width(W)	0.80mm Nom.
Thickness(T)	0.80mm +/-0.20mm
Recommended Land Pattern (A)	0.70mm Nom.
Recommended Land Pattern (B)	0.70mm Nom.
Recommended Land Pattern (C)	0.70mm Nom.


Electrical Characteristics	
Inductance	2.2uH +/-20% at 7.96MHz
Rated Current (L Change) [Max.]	160mA (30% Down)
Rated Current (Temperature Rise) [Max.]	275mA (20degC Rise)
DC Resistance [Nom.]	330mΩ
DC Resistance [Max.]	429mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Flow, Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.005g


•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.

GLF1608T2R2M


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

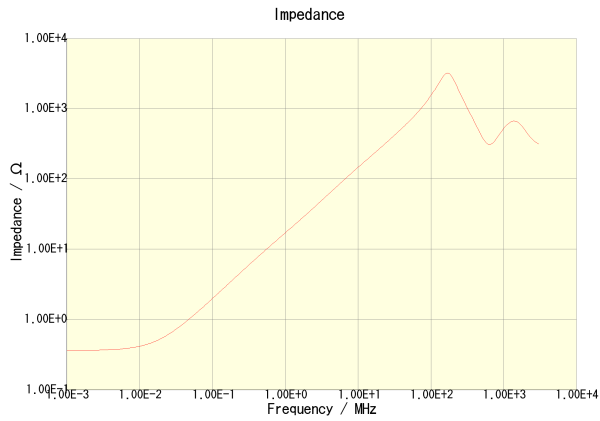


GLF1608T2R2M

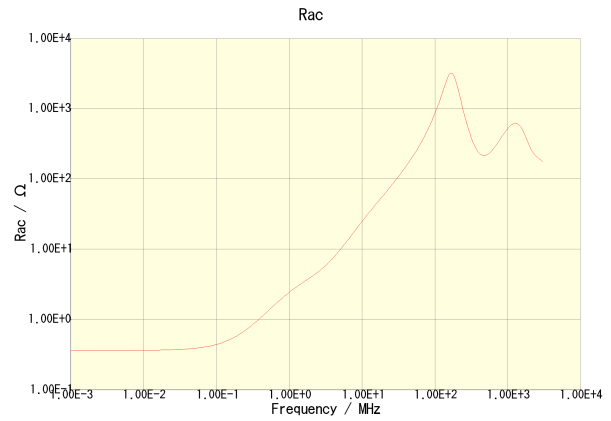

GLF1608T2R2M

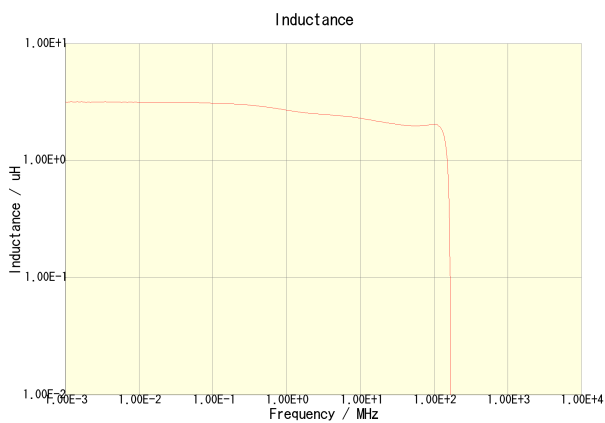

GLF1608T2R2M

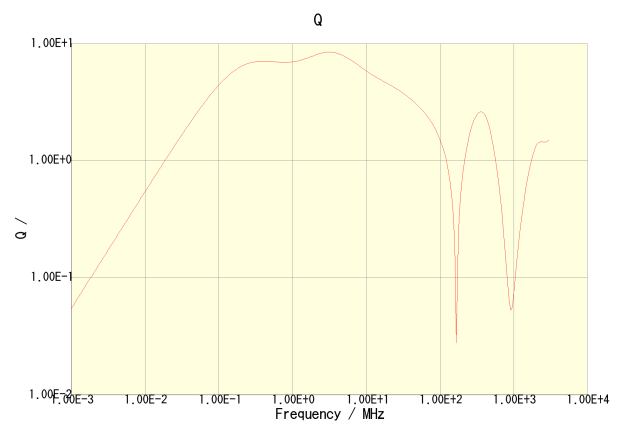


GLF1608T2R2M


- This PDF document was created based on the data listed on the TDK Corporation website.
- All specifications are subject to change without notice.

GLF1608T2R2M

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

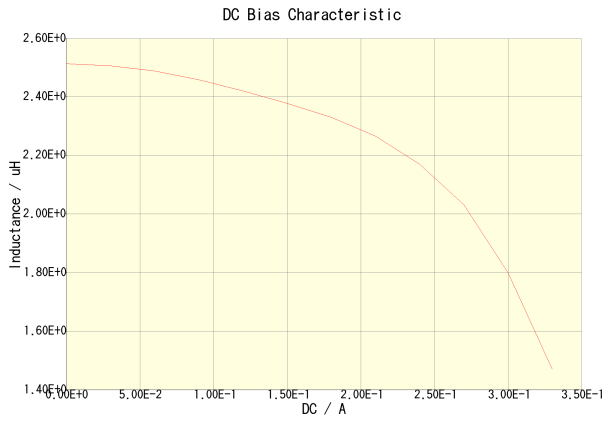

GLF1608T2R2M(Amb. Temp. = 20degc)

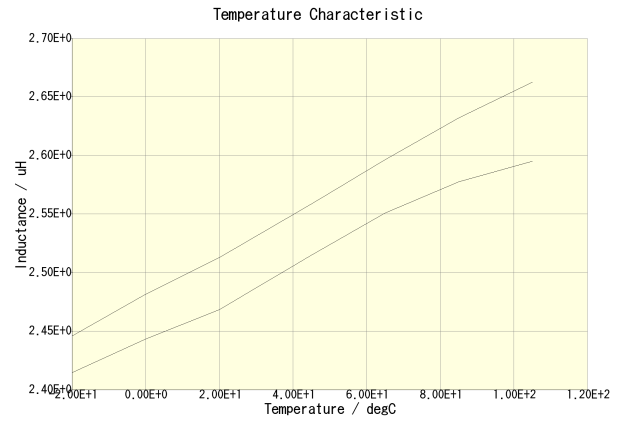

GLF1608T2R2M(DC = 0A)

GLF1608T2R2M(DC = 0.08A)

Temperature Rise by DC	
no data available	

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.