



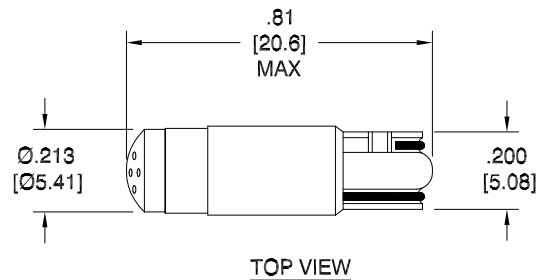

ACTUAL SIZE

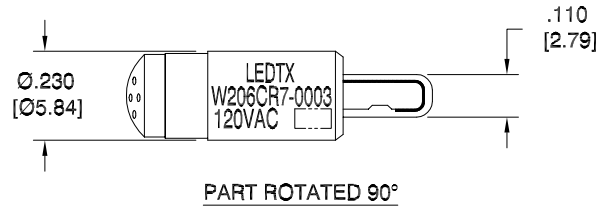

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. ADAPTER MATERIAL: EPOXY, CLEAR
3. SLEEVE MATERIAL / COLOR: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED) / RED

REVISION NOTIFICATION

- ☐ DLC
- ☐ UL/ETL
- ☐ MADE IN USA
- ☐ CUSTOMER _____
- ☐ OTHER _____

REDLINE CHECKLIST

- ☐ REDLINE(YES)
- ☐ DATE: _____
- ☐ INITIATED BY: _____
- ☐ ECR REQUIRED YES ☐ NO ☐
- ☐ WORK ORDER# _____

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

W206CR7-0003	W206CR7-120VAC/8	ULTRA RED	120Vac	0.30 W	0.005 A	0.022cd	657	160°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
LED[®] LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505		-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		TITLE				
				W206CR7-0003 (W206CR7-120VAC/8)				
		DWG NO		SCALE	SHEET	DATE		
		W206-120VAC		2:1	1 OF 1		03-19-12	
		CODE IDENT NO. 8Z410	DWG BY GP 03-19-12	CHK BY	QA SB 08-27-18	MFG LD 08-27-18	R&D KS 08-27-18	