

Product data sheet

Specifications



slim interface relay, Harmony
Electromechanical Relays, pre
assembled, 6A, 1CO, with LED,
screw connec to rs, 24V AC/DC

RSL1PVB

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Series name	RSL series
Product or Component Type	Pre-assembled plug-in relay with socket
Relay Type	Slim interface relay
Contact operation	Standard
Contacts type and composition	1 C/O
Status LED	With
[Uc] control circuit voltage	24 V AC/DC
[Ithe] conventional enclosed thermal current	6 A -40...131 °F (-40...55 °C)

Complementary

Fixing Mode	Plastic compression spring
Average resistance	3390 Ohm DC 23 °C +/- 10 %
[Uimp] rated impulse withstand voltage	6 kV IEC
[Ie] rated operational current	6 A 1 C/O AC-1/DC-1)IEC/UL
minimum switching current	100 mA
Minimum switching voltage	12 V
[Ui] rated insulation voltage	250 V IEC 277 V cUL
Minimum switching capacity	120 mW
Maximum switching voltage	277 V
Drop-out voltage threshold	>= 0.05 Uc
Load current	6 A 250 V AC 0.5 mm mounting distance
Electrical durability	60000 cycles resistive, 6 A 250 V, AC-1
Maximum switching capacity	1500 VA 150 W
Operating time	5 ms reset 12 ms
Terminals description ISO n°1	(A1-A2)CO (11-12-14)OC
Average coil consumption	0.17 W, DC
Mechanical durability	10000000 cycles

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Safety reliability data	B10d = 60000
Operating rate	<= 18000 cycles/hour no-load <= 360 cycles/hour under load
Tightening torque	< 0.5 N.m M2.5
Control Type	Without lockable test button
Compatibility code	RSL
Contact terminal arrangement	Separate
Connections - terminals	Screw connectors, 1 x 0.2...1 x 2.5 mm² AWG 24...AWG 14) flexible with cable end Screw connectors, 1 x 0.2...1 x 2.5 mm² AWG 24...AWG 14) solid without cable end
Protection category	RT III
Mounting Support	35 mm symmetrical DIN rail
Operating position	Any position
Test levels	Level A group mounting
Device presentation	Complete product
Sale per indivisible quantity	10
Contacts material	Silver alloy (AgSnO2)
Shape of pin	Flat (PCB type)
Width	0.2 in (6.2 mm)
Height	3.09 in (78.6 mm)
Depth	3.7 in (95 mm)
Net Weight	0.064 lb(US) (0.029 kg)

Environment

Input voltage	24 V AC/DC 21.6...28.8 V)
Dielectric strength	1000 V AC between contacts 4000 V AC between coil and contact
IP degree of protection	IP40 conforming to IEC 60529
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
Standards	CSA C22.2 No 14 UL 508 IEC 61810-1
Product Certifications	UL GOST CSA
Marking	CE
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Vibration resistance	10 gn +/- 1 mm 10...150 Hz)10 cycles not operating IEC 60068-2-6 5 gn +/- 1 mm 10...150 Hz)10 cycles in operation IEC 60068-2-6
Shock resistance	10 gn 11 ms) in operation IEC 60068-2-27 5 gn 11 ms) not operating IEC 60068-2-27

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480077838

Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.28 in (0.700 cm)
Package 1 Width	3.15 in (8.000 cm)
Package 1 Length	3.86 in (9.800 cm)
Package 1 Weight	1.023 oz (29.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.87 in (7.300 cm)
Package 2 Width	3.43 in (8.700 cm)
Package 2 Length	4.17 in (10.600 cm)
Package 2 Weight	11.076 oz (314.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	300
Package 3 Height	11.81 in (30.000 cm)
Package 3 Width	11.81 in (30.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	21.865 lb(US) (9.918 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	27

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

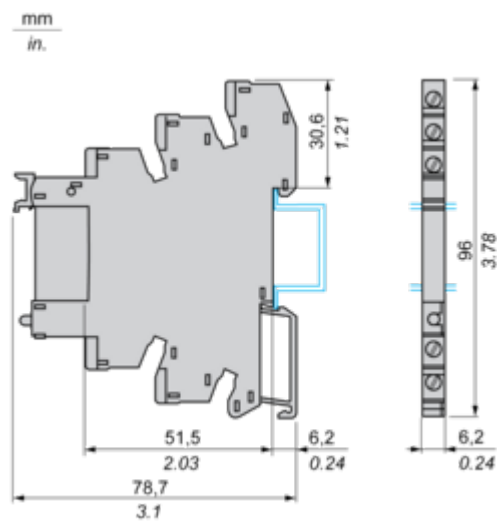

Technical Illustration

Dimensions

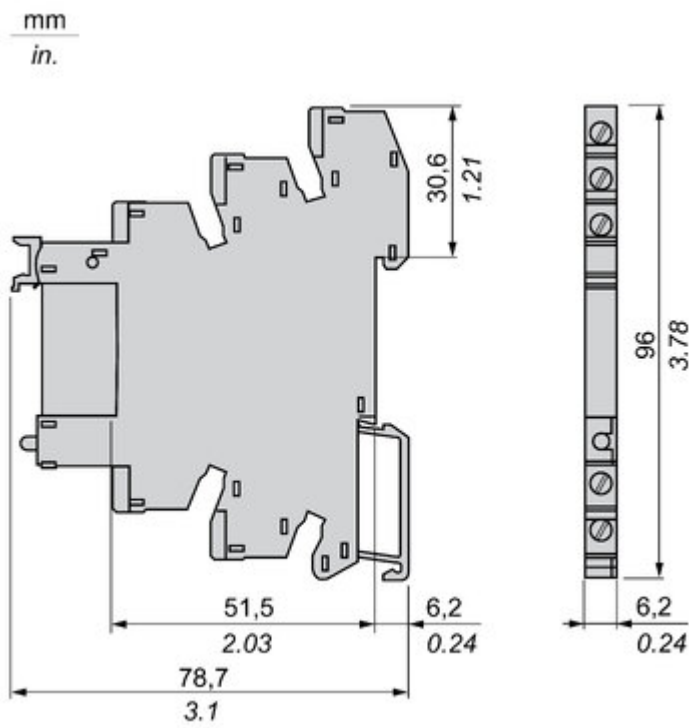


Image of product / Alternate images

Alternative

