

TDK-Lambda CUS800M and CUS1000M Series

3.3" x 6.7" 680W to 1000W AC-DC Power Supplies

<https://product.tdk.com/en/power/cus-m>
www.emea.lambda.tdk.com/cus1000m



Medical



Industrial



Test



LED



Broadcast



COMM



The very compact CUS800M and CUS1000M AC-DC power supplies are packaged in a 3.3" x 6.7" footprint and can deliver up to 800W or 1000W with efficiencies up to 95.5%. All models have medical (IEC 60601-1) and audio/video, information and communication technology equipment (IEC 62368-1) certifications. A variable speed fan, 5V 2A standby voltage, remote on/off, remote sense and a Power Good signal is standard.

Features	Benefits
• Medical Certifications (2 x MOPP)	• Generally required for B and BF Type Medical Equipment
• $\leq 0.250\text{mA}$ Leakage Current	• Simpler System Compliance
• Class B Conducted and Radiated EMI	• Easier System EMC Compliance
• Compact 3.3 x 6.7 x 1.67" Size	• Space Saving in End Equipment
• Variable Speed Cooling Fan	• Lower Audible Noise

Model Selector							
Model	Nominal Output Voltage (V)	Output Adjustment (V)	Maximum Current (A)	Peak Current (A)	Maximum Power (W)	Maximum Peak Power (W)	Efficiency 115 / 230Vac (%)
CUS800M-12	12	11.7 - 12.6	56.7	66.7	680.4	800.4	90.8 / 92.5
CUS1000M-12	12	11.7 - 12.6	66.7	83.4	800.4	1000.8	92 / 93.6
CUS800M-24	24	23.4 - 25.9	33.4	-	801.6	-	92 / 94
CUS1000M-24	24	23.4 - 25.9	41.7	-	1000.8	-	93 / 95
CUS800M-36	36	35.1 - 38.8	22.2	-	799.2	-	92.5 / 94.6
CUS1000M-36	36	35.1 - 38.8	27.8	-	1000.8	-	93.3 / 95.3
CUS800M-48	48	46.8 - 51.8	16.7	-	801.6	-	92.2 / 94
CUS1000M-48	48	46.8 - 51.8	20.9	-	1003.2	-	93.5 / 95.5

CUS1000M	-	12
CUS800M (680 to 800W) CUS1000M (800 to 1000W)		Output voltage 12, 24, 36, 48

Specifications			
Model		CUS800M	CUS1000M
Input			
Input Voltage Range (Operating)	Vac	85 - 265 (Derate linearly to 90% load from 90 to 85)	
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac only)	
Input Frequency	Hz	47 - 63	
Input Current at 115 / 230Vac	A	8.0 / 4.0	10.0 / 5.0
Inrush Current at 115 / 230Vac (Cold Start)	A	25 / 50	
Leakage Current	uA	<250 at 265Vac 60Hz	
Touch Current (Enclosure Leakage)	uA	Not applicable	
Power Factor (115 / 230Vac)	-	0.99 / 0.95	
Harmonic Compliance	-	Meets IEC61000-3-2 Class A	
No Load Power Consumption	W	Typically <0.6W at 230Vac (Remote off and no load on 5Vsb)	
Hold Up Time (typ) at 115Vac Input	ms	14	11
Efficiency	-	See model selector	
Conducted & Radiated EMI	-	EN55032, EN55011-B, FCC-B	
Immunity	-	Compliant with EN60601-1-2:2015 (Ed4), IEC61000-4.2, -3, -4, -5, -6, -8, -11	
Insulation Class	-	Class I	
Safety Certifications and Markings	-	IEC/EN/UL/CSA62368-1, IEC/EN/ES/CSA60601-1. CE Mark and UKCA Mark	

Immunity					
Test	Standard	Test Level	Criteria	Notes (The power stated below is total power (main output + standby output))	
				CUS800M	CUS1000M
ESD	EN61000-4-2	3	A	-	-
Radiated Susceptibility	EN61000-4-3	3	A	-	-
Electrical Fast Transient Burst	EN61000-4-4	4	A	AC input power port	
Surge	EN61000-4-5	3		-	-
Conducted Susceptibility	EN61000-4-6	3	A	-	-
Magnetic fields	EN61000-4-8	4	A	-	-
Voltage Dips and Input Interruptions	EN61000-4-11 Class 3 Industrial, incl EN55024 (100Vac)	0% for 1/2 cycle	A	A; < 530W, B; > 530W	A; < 530W, B; > 530W
		0% for 1 cycle	A/B	A; < 330W, B; > 330W	A; < 400W, B; > 400W
		40% for 10/12 cycles	A/B		
		70% for 25/30 cycles	A		
		80% for 250/300 cycles	A		
		0% for 250/300 cycles	B		
	EN61000-4-11 Class 3 Industrial, incl EN55024 (240Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W
		0% for 1 cycle	A/B		
		40% for 10/12 cycles	A		
		70% for 25/30 cycles	A		
		80% for 250/300 cycles	A		
		0% for 250/300 cycles	B		
	EN60601-1-2:2015 (100Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W
		0% for 1 cycle	A/B		
		70% for 25/30 cycles	A		
		0% for 250/300 cycles	B		
	EN60601-1-2:2015 (240Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W
		0% for 1 cycle	A/B		
		70% for 25/30 cycles	A		
		0% for 250/300 cycles	B		
SEMI F47 Line Dip	SEMI F47	-	-	At input voltages > 200Vac	

Specifications			
Model	CUS800M		CUS1000M
Output			
Switching Frequency	kHz	Primary-secondary converter: LLC resonant 50k to 300kHz	
Line Regulation	mV	12V: 60, 24V: 120, 36V: 180, 48V: 240	
Load Regulation	mV	12V: 120, 24V: 240, 36V: 360, 48V: 480	
External Load Capacitance	uF	12 - 36V: 10,000, 48V: 7,000	
Ripple & Noise	mV	12V: 240, 24V: 360, 36V: 480, 48V: 480	
Temperature Coefficient	%/°C	±0.02	
Minimum Load	-	No minimum load required	
Overcurrent Protection(1)	A	12V: >70.1, 24V: >35.1, 36V: >23.4, 48V >17.6	12V: >87.6, 24V: >43.8, 36V: >29.2, 48V >22
Overvoltage Protection	-	12V: 13.8 - 16.2, 24V: 27.6 - 32.4, 36V: >41.4 - 48.6, 48V >55.2 - 64.8	
Overtemperature Protection	-	Latching (unit shutdown), cycle AC input to reset	
Remote Sense	-	0.5V total compensation	
Remote On/Off	-	Opto-isolated. Inhibit: Low = ON, High = OFF	
Power Good	-	Combined AC Fail and DC OK opto isolated signal	
Standby Voltage	-	5V 2A	
Parallel Operation	-	Not possible	
Environmental			
Operating Temperature (-25°C start-up)	°C	-20 to +70, derate linearly to 60% load from 40 to 70	
Storage Temperature	°C	-40 to +75	
Humidity (non condensing)	%RH	10 - 95. Operating and storage	
Cooling	-	Variable speed fan, air exits across output terminals. Typical 30dBA at 20% load, 42dBA at full load	
Altitude	m	5,000. Operating, transportation and storage	
Withstand Voltage (For 1 minute)	Vac	Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPP), Output to Ground 1,500 (1xMOPP)	
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500Vdc	
Vibration (Non Operating)	-	10-55Hz (1 min sweep). Maximum 19.6m/s², 1 hour each	
Shock	-	<196m/s²	
Other			
Weight (Typ)	g	CUS800M: 810, CUS1000M: 850	
Size (LxWxH)	mm	171 x 85 x 42.5	
Size (LxWxH)	Inches	6.73 x 3.35 x 1.67	
Connectors	-	Screw terminals. Signals: JST B8B PHDSS	
MTBF - Telcordia SR-332 ⁽²⁾	Hours	25°C : 867,161, 30°C : 757,679, 40°C : 522,715	
Warranty	yrs	5	

Notes:


See website for detailed specifications, test methods and installation manual

Specification parameters apply at 25°C ambient temperature unless otherwise stated.

(1) Hiccup with automatic recovery. If the output is shorted, an AC power reset may be required

(2) 24V 41.7A, 115Vac input

Outline Drawing

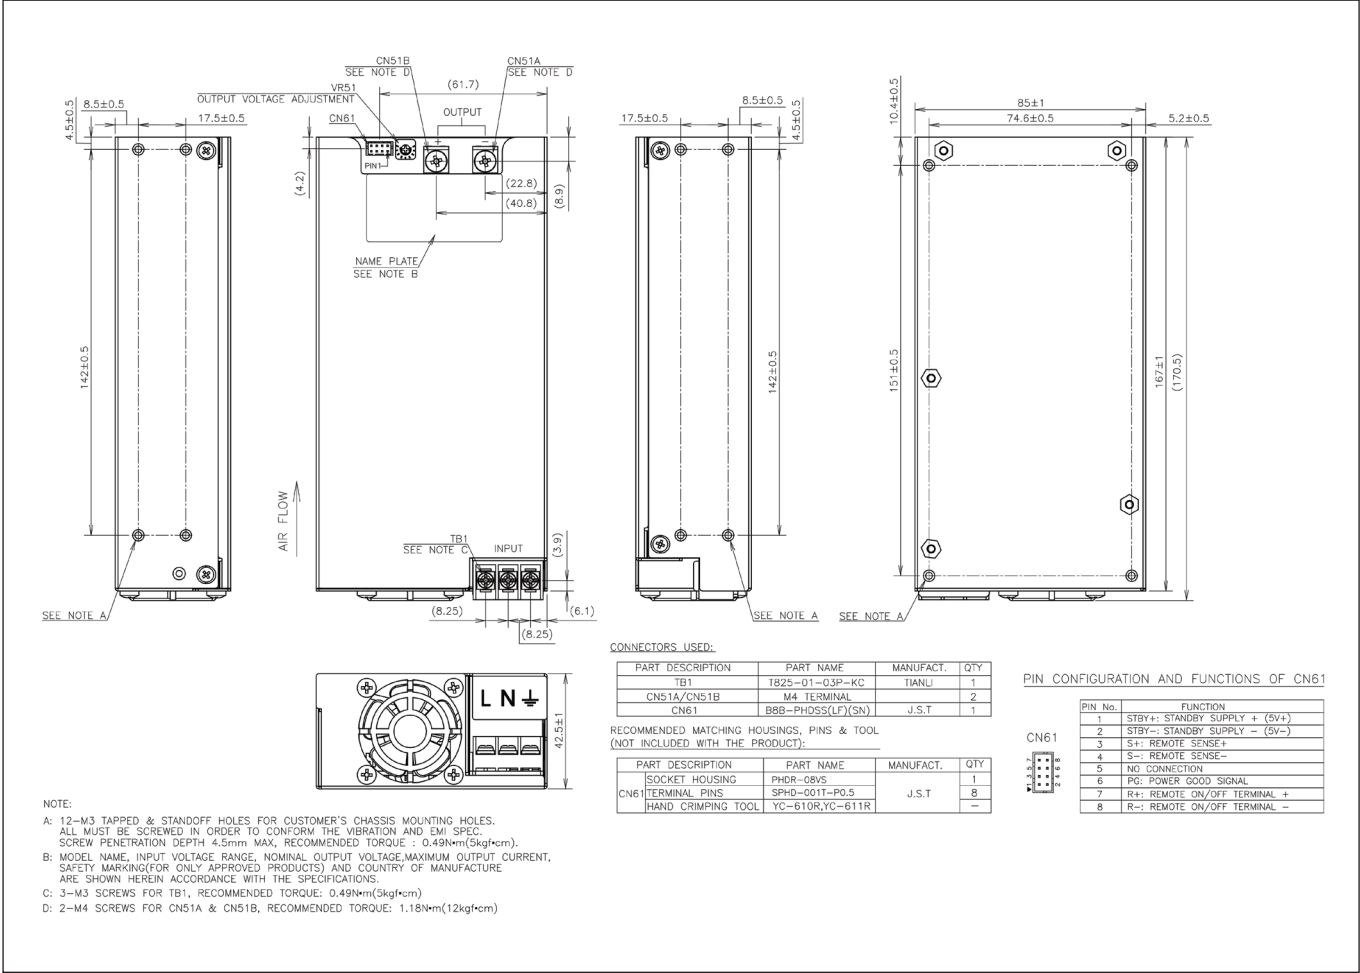



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
tff.fr-powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
tff.it-powersolutions@tdk.com
www.emea.lambda.tdk.com/it



Netherlands

tff.nl-powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
tlg.at-powersolutions@tdk.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
tlg.ch-powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
tlg.dk-powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.marketing@tdk.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com

