
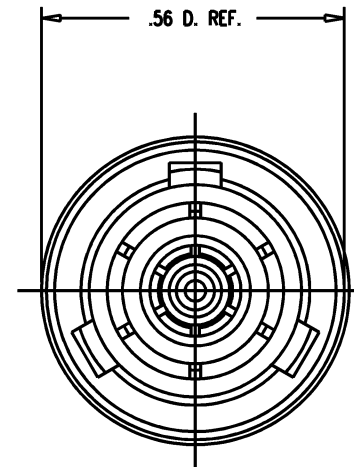


GSD

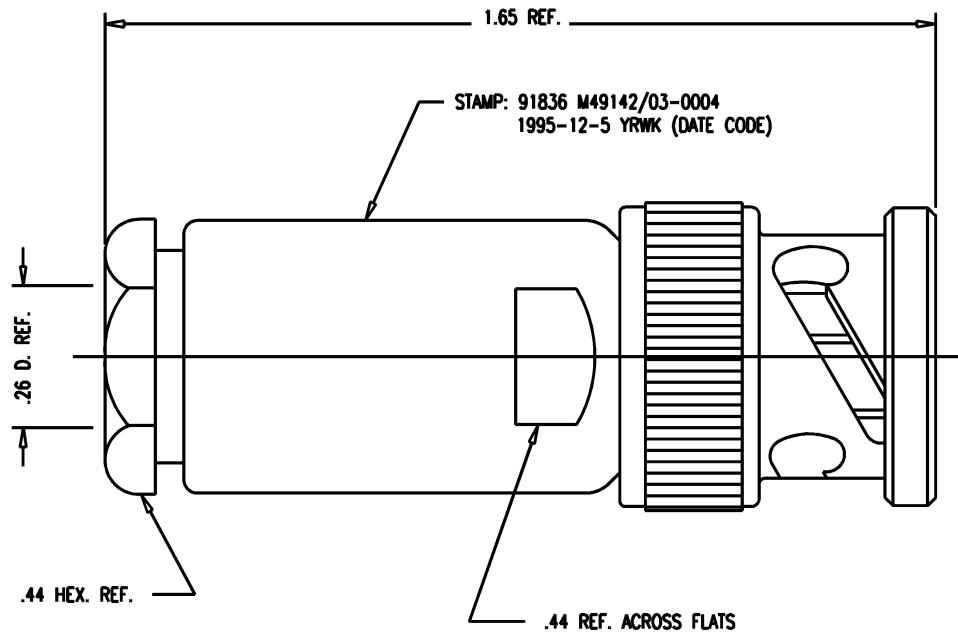

NOTES:

- FOR USE WITH D3-7619-5/338 CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-392.
- INTERFACE PER MIL-STD-348, FIG. 201-1
- MATERIALS:
 - INSULATORS-TEFLON, ASTM-D-4894
 - GASKET } SILICONE RUBBER, ZZ-R-765
 - O-RINGS }
 - SPRING WASHER }
 - INTERMEDIATE CONTACT } BERYLLIUM COPPER, ASTM-B-196
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
 - CENTER CONTACT-GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
 - WORKING VOLTAGE-400 VRMS

GSD

M49142/03-0004

REVISIONS		
ISSUE	CHANGES	
3	CN 37318 D REDRAWN KH 04/21/97	
4	CN 38252 C BDH 03/15/01	
5	CN 38599 E TML 07/31/02	
1995125S		
SCALE 4:1		
APPROX SURFACE AREA		
1995-12-5		
USED ON		
REF:		
PLUG, TRB		
DRAWN	AMD	DATE 03/04/88
DESIGN		DATE
APPR.		DATE
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
M49142/03-0004		