




+ HARNESSING
HEAT SHRINK BOOTS

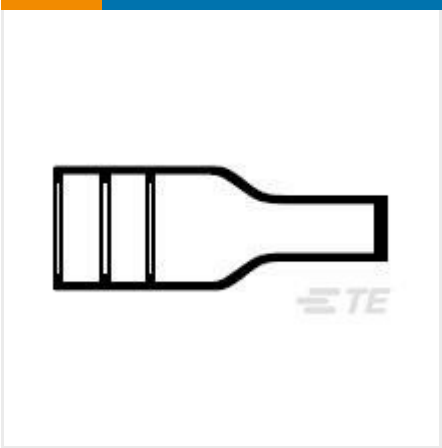

✓ Active

TE CONNECTIVITY (TE)
202D132-12-0
[Raychem](#) | [CAP](#) , [CRPS](#)

202D132-12-0
TE Internal Number: 811084-000
Alias ID: 3-1196303-6

[EU RoHS Compliant](#)
[EU ELV Compliant](#)

Lipped Yes

Operating Temperature Range (°C) -55 – 200

Fluid/Chemical Resistance Suitable for long term fluid immersion & elevated temperatures including fuel

Adhesive Options S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)

Material Systems Code 200

↓ **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

Boot, Straight, With Lips
PDF
English

Product Specifications

Product Specification

Raychem Fluoro Elastomer Molded Components Flame-Retarded, Flexible, Heat-Shrinkable
PDF
English

Product Environmental Compliance

Safety Data Sheet

Heat-Shrinkable Fluoropolymer Products

PDF

English

Heat-Shrinkable Fluoropolymer Products

PDF

German

Heat-Shrinkable Fluoropolymer Products

PDF

French

Heat-Shrinkable Fluoropolymer Products

PDF

Dutch

Heat-Shrinkable Fluoropolymer Products

PDF

Italian

Heat-Shrinkable Fluoropolymer Products

PDF

Spanish

Heat-Shrinkable Fluoropolymer Products

PDF

Swedish

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 200

Adhesive Pre-Coat No

Entry Size (Braided or Magneform Adapter) 6, 7, 8, 9

Entry Size (Solid or Fixed Adapter) 4 – 6

Material Modified Fluoro-Elastomer

Entry Size (Tinel-Lock Adapter) 5, 6, 7

Entry Size (Spin Coupling Adapter) 6 – 12

Dimensions

Cable Diameter Range 6.6 – 14.7 mm [.26 – .579 in]

Wire/Cable Outside Diameter .3 in, .31 in, .35 in, .39 in, 10 mm, 8 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 200

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards BS-G-198-5-DD, DEF Std 59-97 Issue 3 Type DD, SAE AS I 81765/4

Other

Fluid/Chemical Resistance Suitable for long term fluid immersion & elevated temperatures including fuel

Adhesive Options S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)

Adhesive Type Adhesive Purchased Separately

Statement of Compliance

Statement of Compliance

PDF