


Data sheet | Item number: 2002-472

Staggered jumper; 2-way; insulated; light gray

www.wago.com/2002-472

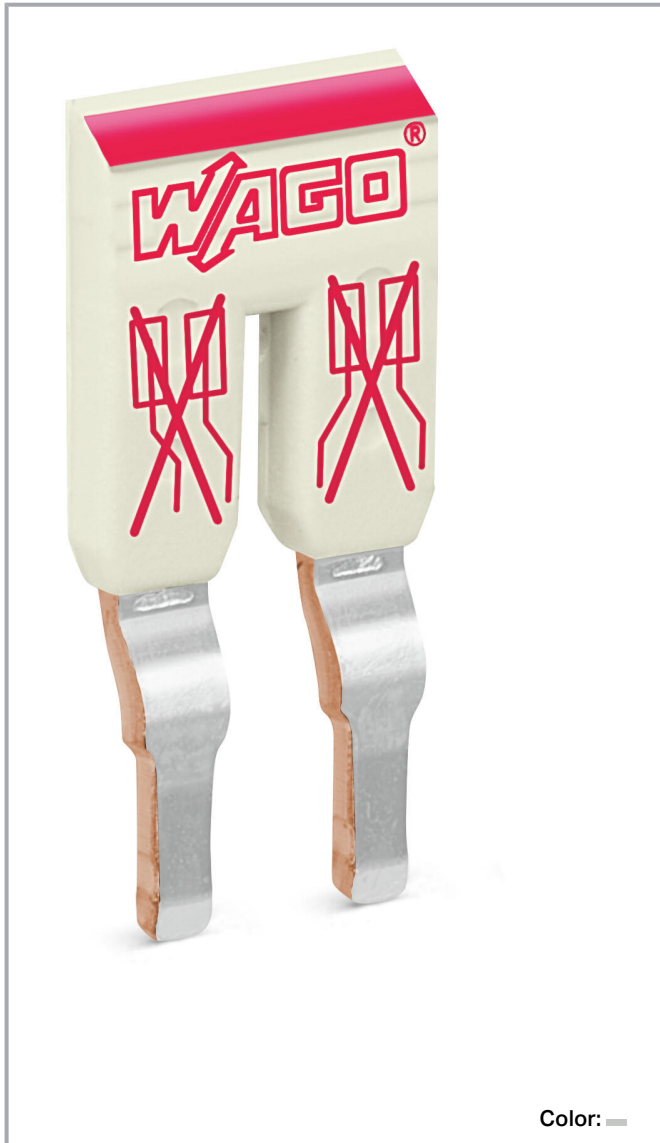

Color: —

Data

Electrical data

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Ratings per IEC/EN

Nominal voltage (III/3)	400 V
Rated surge voltage (III/3)	6 kV
Rated current	25 A

Connection data

Jumper assignment	2-way
-------------------	-------

Physical data

Width	9 mm / 0.354 inch
Jumper assignment	2-way

Material data

Color	light gray
Fire load	0.032 MJ
Weight	0.9 g

Commercial data

Product Group	22 (TOPJOB S)
Packaging type	bag
Country of origin	DE
GTIN	4055143692250
Customs tariff number	85366990990

Downloads

Documentation

Bid Text

2002-472	2017 Apr 27	doc	Download
doc - Datei		24.6 kB	

2002-472	2019 Feb 19	xml	Download
X81 - Datei		2.7 kB	

Additional Information

Technical explanations	2019 Apr 3	pdf	Download
------------------------	------------	-----	----------

Subject to changes. Please also observe the further product documentation!

CAD/CAE-Data

CAD data

2D/3D Models 2002-472	URL	Download
-----------------------	---------------------	--------------------------

CAE data

ZUKEN Portal 2002-472	URL	Download
WSCAD Universe 2002-472	URL	Download
EPLAN Data Portal 2002-472	URL	Download


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2002-472	URL	Download
Staggered jumper; 2-way; insulated; light gray		


Installation Notes

Commoning

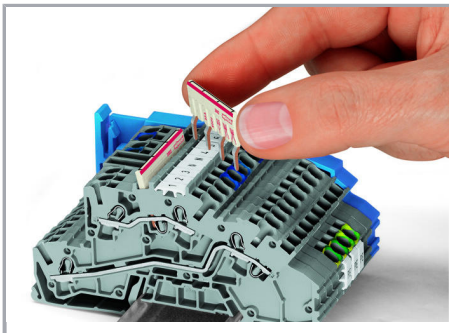

Orient the staggered jumpers' red stripes on the inside.


Insert the staggered jumper and push down until it hits the backstop.

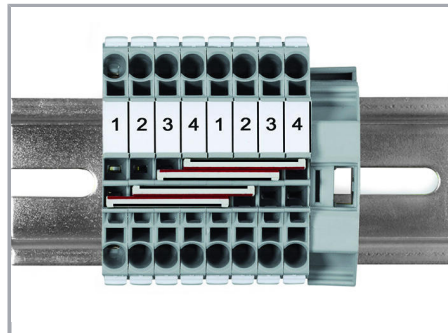

Commoning two potentials in one single jumper slot via extremely slim staggered jumpers.

Subject to changes. Please also observe the further product documentation!


Commoning

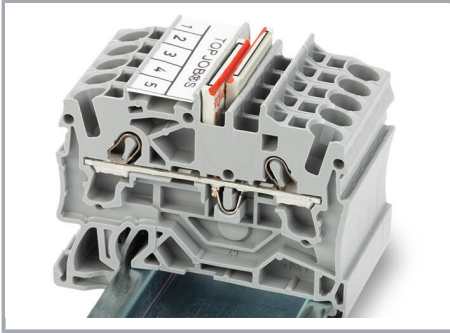

Orient the staggered jumpers' red stripes on the inside.

Insert the staggered jumper and push down until it hits the backstop.

Commoning

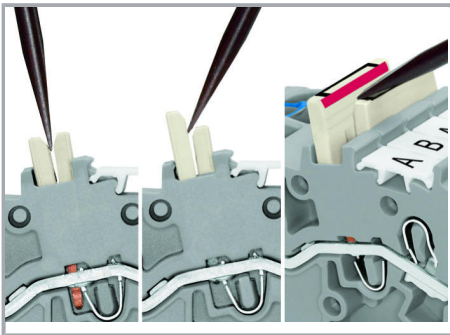


Removing a staggered jumper:

Insert the operating tool between the staggered jumpers, then lift up the jumper.


Commoning

Subject to changes. Please also observe the further product documentation!

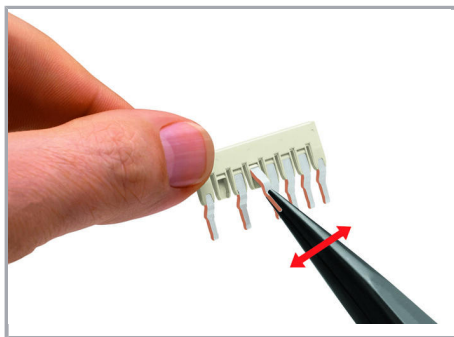


Staggered jumper (seven contacts)

Breaking off contact lugs. Individual jumper contacts can be broken off by bending them. The remaining piece of insulation will meet requirements for clearances and creepage distances.

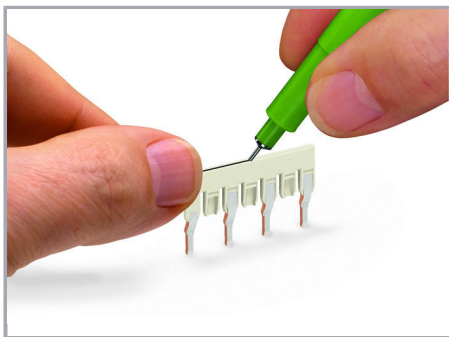

Staggered jumpers

Marking with a felt-tip pen.

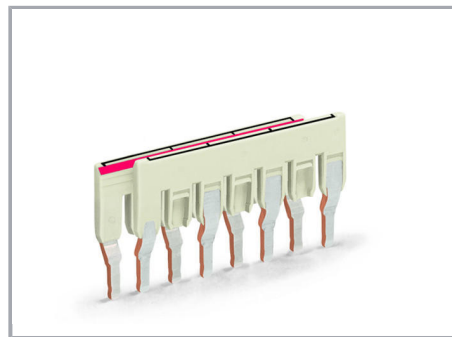

Staggering jumpers in a single jumper slot:

Custom staggered jumpers can be created, e.g., for bridging over a terminal block with a different potential. Make sure that only one contact lug is in contact with the terminal block.

The contact lugs of the customized staggered jumpers contact the terminal blocks via the gaps created in the second jumper. Insert and press the ready-made jumper assembly into the jumper slot until it hits the backstop.

Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!