


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

1764-2

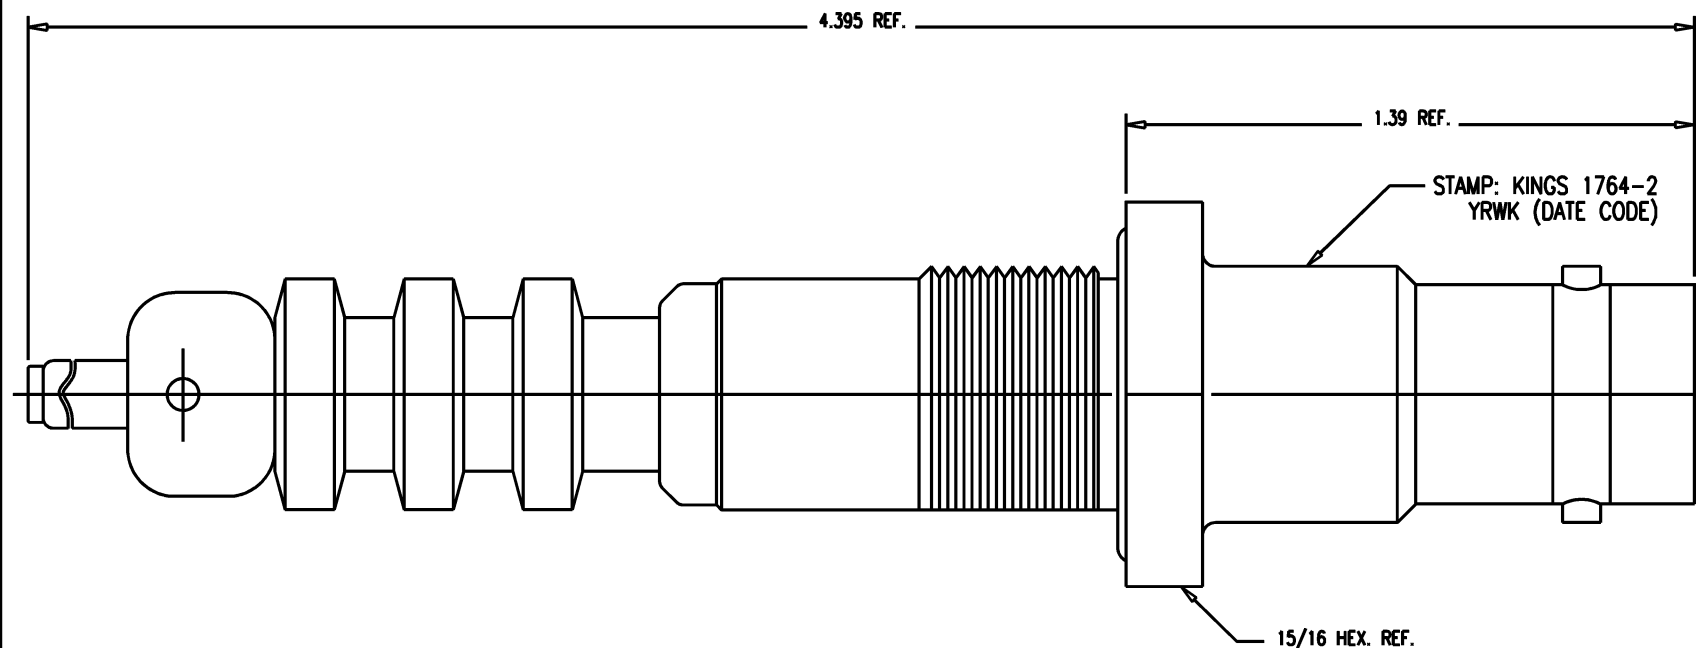

NOTES:

1. MATERIALS:

INSULATOR: HIGH DENSITY POLYETHYLENE, ASTM-D4976, WHITE.
O-RINGS: SILICONE RUBBER, ZZ-R-765; FLUOROCARBON RUBBER, AMS7276, CLASS I.
ALL OTHER PARTS: BRASS, ASTM-B16


2. FINISHES:

CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)

3. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: NON-CONSTANT
VOLTAGE RATING: 20 KVDC
INSULATION RESISTANCE: 10^6 MEGOHMS.

4. LEAKAGE MAY NOT EXCEED 10×10^{-7} CC/SEC.
OF TRACER GAS AT ATMOSPHERIC PRESSURE.



MOUNTING HOLE

SD

REVISIONS

ISSUE	CHANGES
0	ER 38762 JLA 01/24/03
1	CN 38925 E JLA 09/11/03

17642S

SCALE 3:1

APPROX SURFACE AREA

USED ON

REF: EOR 396 & E-20057

20 KV HV, RECEPTACLE
BULKHEAD MOUNT

DRAWN	JLA	DATE	05/07/02
DESIGN	JLA	DATE	05/07/02
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

1764-2