

Announcement

August 2023

<u>Specification change: GT3 series multi-function timers and GT5 series miniature electronic timers</u>

IDEC would like to inform you of a few specification changes regarding our GT3 series multi-function timers and GT5 series miniature electronic timers. Details are as follows:

1. Subject models

GT3 series multi-function timers: All products GT5 series miniature electronic timers: All products

Note: Special products are also included.





2. Modification details

GT3

Change	Current	New	
Printing method	Silk printing	Laser marking	
Printing surface	Тор	Top and bottom	
Instruction manual	Shipped with the products	No longer be shipped with the products (can be downloaded from QR code on the product)	
	-	Display change of standard and addition of QR code	
Display	TOP IDEC ELECTRONIC TIMER UL Listed when used in combination with IDEC's DIPLEP-OR* type socket. (*-may be followed by suffix letter A.B.C or U) SEE INSTRUCTION SHEET FOR TIME RANGE. 6 5 7 (~) 8 2 (~) TYPE: G T 3 A - 1 A F 2 0 CONTACT RATING: 5A (RES.) 120VAC/30VDC 3A (RES.) 240VAC POWER: 100-240VAC (50/60Hz) IDEC CORPORATION MANUFACTURED IN TAIWAN	TOP IDEC ELECTRONIC TIMER TYPE: GT3A-1AF20 CONTACT RATING: 5A (RES.) 120VAC/30VDC 3A (RES.) 240VAC POWER: 100-240VAC (60/60Hz) UL Listed when used in combination with IDEC's SR2P-06 * type socket. (*e-may be followed by suffix letter A. B. C. or U) - Conductor Temperature Rating 60°C min Use No.14AWG to No.18AWG, Copper conductors only Terminal Torqure 1.0 to 1.3 N·m. Use in Pollution Degree 2 environment.	




Announcement

GT5P

Change	Current	New
Instruction manual	Shipped with the products	No longer be shipped with the products (can be downloaded from QR code on the product)
Display	TOPEC ELECTRONIC TIMER SEE INSTRUCTION SHEET FOR TIME RANGE. I. Gr. B TYPE: TOPECA GT5P-P10MA200 CONTACT RATING: 3A(RES.)240VAC 5A(RES.)120VAC/30VDC CAUTION:Do not apply voltage to terminals #3 and #4. START TOPECA EXTERNAL CONTROL SIGNAL TOPECA POWER: 200-240VAC(50/60Hz) MADE IN TAIWAN * * * * *	Addition of QR code IDEC ELECTRONIC TIMER SEE INSTRUCTION SHEET FOR TIME RANGE. I. Gr. B TYPE: CT5P-P10MA200 CONTACT RATING: 3A (RES.) 240VAC 5A (RES.) 120VAC/30VDC POWER: 200-240VAC (50/60Hz) CAUTION: Do not apply voltage to terminals #3 and #4. START EXTERNAL CONTROL SIGNAL Use in Pollution Degree 2. MANUFACTURED IN TAIWAN INTAIWAN INTA

GT5Y

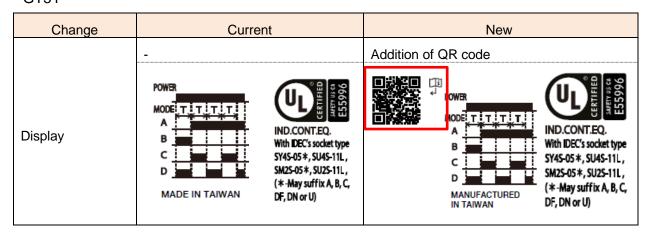

Note: There is no other specification change.

3. Schedule

Starting December 2023 (or sooner depending on our stock situation)

Note: After December 2023, Current and new products may be mixed in the same shipment.



Announcement

4. Part number and prices

No change

5. Identification

Modified products will have an identification dot displayed at the end of the lot number on their product case and product.

<Product case>



<Product>



This identification letter will be used with modified products made until June 2024.