

DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM4558/4559 integrated circuit is a dual high-gain operational amplifier internally compensated and constructed on a single silicon chip using an advanced epitaxial process.

Combining the features of the NJM741 with the close parameter matching and tracking of a dual device on a monolithic chip results in unique performance characteristics. Excellent channel separation allows the use of the dual device in single NJM741 operational amplifier applications providing density. It is especially well suited for applications in differential-in, differential-out as well as in potentiometric amplifiers and where gain and phase matched channels are mandatory.

■ FEATURES

- Operating Voltage (±4V~±18V) • High Voltage Gain (100dB typ.) High Input Resistance $(5M\Omega \text{ typ.})$
- Bipolar Technology
- DIP8, DMP8, SIP8 Package Outline SOP8 JEDEC 150mil (only NJM4558),

SSOP8 (only NJM4558)

■ PACKAGE OUTLINE



NJM4558D NJM4559D (DIP8)



NJM4558M NJM4559M (DMP8)



NJM4558V (SSOP8)




NJM4558L NJM4559L (SIP8)




NJM4558E (SOP8)

■ PIN CONFIGURATION



NJM4558D, NJM4558M, NJM4558E, NJM4558V NJM4559D, NJM4559M




NJM4558L NJM4559L

PIN FUNCTION

- 1. A OUTPUT
- 2. A INPUT
- 3. A +INPUT
- 4. V
- 5. B +INPUT
- 6. B INPUT
- 7. B OUTPUT
- 8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

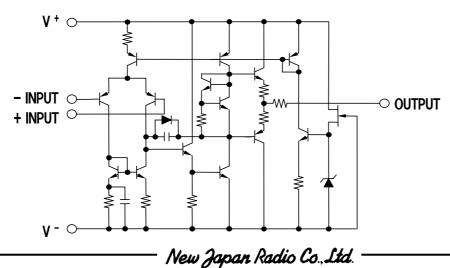

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|--------------------|---|------|
| Supply Voltage | V ⁺ /\/ | ± 18 | V |
| Differential Input Voltage | V_{ID} | ± 30 | V |
| Input Voltage | V _{IC} | ± 15 (note1) | V |
| Power Dissipation | P _D | (DIP8) 500 (DMP8) 300 (SOP8) 300 (SSOP8) 250 (SIP8) 800 | mW |
| Operating Temperature Range | T _{opr} | -40~+85 | °C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |

(note1) For supply voltage less than ± 15 V,the absolute maximum input voltage is equal to the supply voltage.


■ ELECTRICAL CHARACTERISTICS


(V⁺/V⁻=±15V,Ta=25°C)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|-----------------|--|------|------|------|-------|
| Input Offset Voltage | V _{IO} | R _S ≤10kΩ | - | 0.5 | 6 | mV |
| Input Offset Current | I _{IO} | | - | 5 | 200 | nA |
| Input Bias Current | I_{B} | | - | 25 | 500 | nA |
| Input Resistance | R_{IN} | | 0.3 | 5 | - | ΜΩ |
| Large Signal Voltage Gain | A_V | R _L ≥2kΩ,V _O =±10V | 86 | 100 | - | dB |
| Maximum Output Voltage Swing 1 | V_{OM1} | R _L ≥10kΩ | ± 12 | ± 14 | - | V |
| Maximum Output Voltage Swing 2 | V_{OM2} | R _L ≥2kΩ | ± 10 | ± 13 | - | V |
| Input Common Mode Voltage Range | V_{ICM} | | ± 12 | 14 | - | V |
| Common Mode Rejection Ratio | CMR | R _S ≤10kΩ | 70 | 90 | - | dB |
| Supply Voltage Rejection Ratio | SVR | R _S ≤10kΩ | 76.5 | 90 | - | dB |
| Operating Current Slew Rate | lcc | | - | 3.5 | 5.7 | mA |
| NJM4558 | SR | | _ | 1 | - | V/µs |
| NJM4559 | SR | | _ | 2 | - | V/µs |
| Equivalent Input Noise Voltage (note2) | V_{NI} | RIAA,R _S =2.2kΩ,30kHz LPF | - | 1.4 | - | μVrms |
| Gain Bandwidth Product | GB | | | | | |
| NJM4558 | | | | 3 | | MHz |
| NJM4559 | | | | 6 | | MHz |


(note2) In regard to Noise Standard, NJRC is preparing for special D Rank type products (V_{NI} =1.8 μV max.) except for SSOP package.


■ TYPICAL CHARACTERISTICS

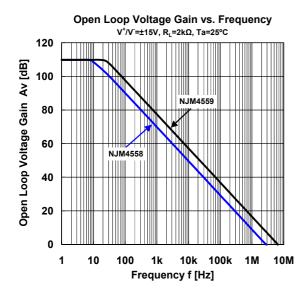


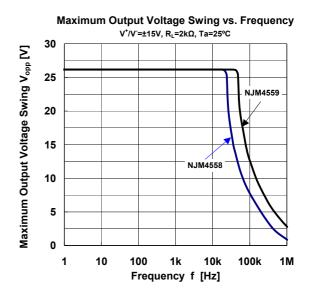

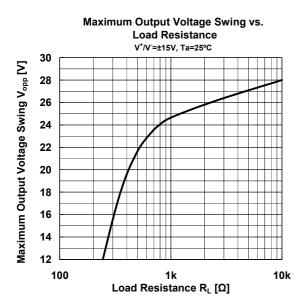


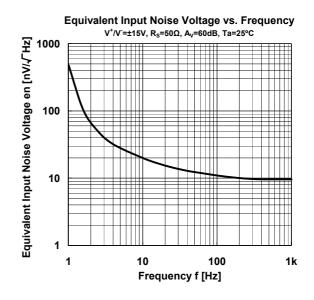


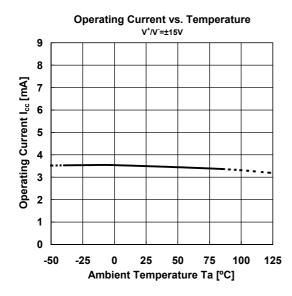


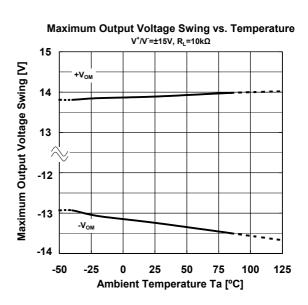


■ TYPICAL CHARACTERISTICS

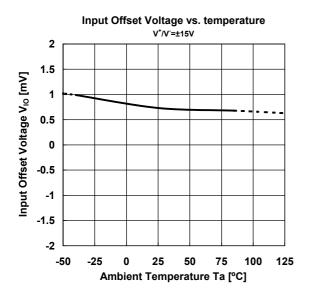

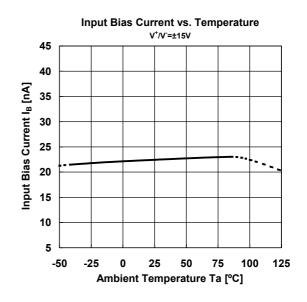

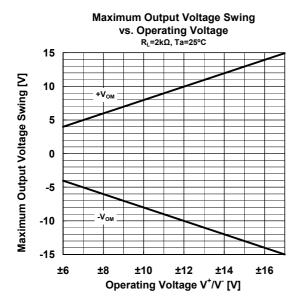

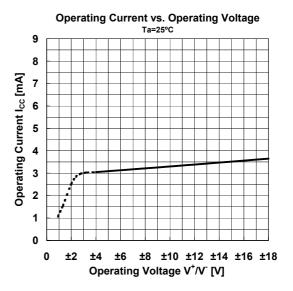

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or ornissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.