

# N-Channel Enhancement-Mode **Vertical DMOS FET**

#### **Features**

- Low threshold 2.0V max.
- High input impedance
- Low input capacitance 50pF typical
- Fast switching speeds
- Low on-resistance
- Free from secondary breakdown
- Low input and output leakage

#### **Applications**

- Logic level interfaces ideal for TTL and CMOS
- Solid state relays
- Battery operated systems
- Photo voltaic drives
- Analog switches
- General purpose line drivers
- Telecom switches

#### **General Description**

This low threshold, enhancement-mode (normally-off) transistor utilizes a vertical DMOS structure and Supertex's well-proven, silicon-gate manufacturing process. This combination produces a device with the power handling capabilities of bipolar transistors and the high input impedance and positive temperature coefficient inherent in MOS devices. Characteristic of all MOS structures. this device is free from thermal runaway and thermally-induced secondary breakdown.

Supertex's vertical DMOS FETs are ideally suited to a wide range of switching and amplifying applications where very low threshold voltage, high breakdown voltage, high input impedance, low input capacitance, and fast switching speeds are desired.

#### Ordering Information

Device	Package	Wafer / Die Options					
	TO-92	NW (Die in wafer form)	NJ (Die on adhesive tape)	ND (Die in waffle pack)			
TN0110	TN0110N3-G	TN1510NW	TN1510NJ	TN1510ND			

For packaged products, -G indicates package is RoHS compliant ('Green'). Devices in Wafer / Die form are RoHS compliant ('Green'). Refer to Die Specification VF15 for layout and dimensions.

## **Product Summary**

Device	BV <sub>DSS</sub> /BV <sub>DGS</sub> (V)	$R_{DS(ON)}$ (max) ( $\Omega$ )	I <sub>D(ON)</sub> (min) (A)	V <sub>GS(th)</sub> (max) (V)	
TN0110N3-G	100	3.0	2.0	2.0	


## **Absolute Maximum Ratings**

Parameter	Value
Drain-to-source voltage	BV <sub>DSS</sub>
Drain-to-gate voltage	$BV_{DGS}$
Gate-to-source voltage	±20V
Operating and storage temperature	-55°C to +150°C


Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. Continuous operation of the device at the absolute rating level may affect device reliability. All voltages are referenced to device ground.

#### **Pin Configurations**





Package may or may not include the following marks: Si or 👘



#### **Thermal Characteristics**

Package			Power Dissipation @T <sub>c</sub> = 25°C (W)	θ <sub>jc</sub> (°C/W)	θ <sub>ja</sub> (°C/W)	†   (m <b>A</b> )	I <sub>DRM</sub> (A)
TO-92	350	2.0	1.0	125	170	350	2.0

#### Notes:


#### Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise specified)

Sym	Parameter	Min	Тур	Max	Units	Conditions	
BV <sub>DSS</sub>	Drain-to-source breakdown voltage	100	-	-	V	$V_{GS} = 0V, I_D = 1.0mA$	
$V_{\rm GS(th)}$	Gate threshold voltage	0.6	-	2.0	V	$V_{GS} = V_{DS}$ , $I_D = 0.5 \text{mA}$	
$\Delta V_{GS(th)}$	Change in V <sub>GS(th)</sub> with temperature	-	-3.2	-5.0	mV/°C	$V_{GS} = V_{DS}$ , $I_{D} = 1.0$ mA	
I <sub>GSS</sub>	Gate body leakage	-	-	100	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$	
		-	-	10	μA	$V_{GS} = 0V, V_{DS} = Max Rating$	
l <sub>DSS</sub>	Zero Gate voltage drain current		-	500	μA	$V_{GS}$ = 0V, $V_{DS}$ = 0.8 Max Rating, $T_A$ = 125°C	
	ON state drain current	0.75	1.4	-	^	$V_{GS} = 5.0V, V_{DS} = 25V$	
I <sub>D(ON)</sub>	ON-state drain current	2.0	3.4	-	A	V <sub>GS</sub> = 10V, V <sub>DS</sub> = 25V	
В	Statia drain to agurag an atata registance	-	2.0	4.5	Ω	$V_{GS} = 4.5V, I_{D} = 250mA$	
R <sub>DS(ON)</sub>	Static drain-to-source on-state resistance	-	1.6	3.0	1 12	$V_{GS} = 10V, I_{D} = 500mA$	
$\Delta R_{DS(ON)}$	Change in R <sub>DS(ON)</sub> with temperature	-	0.6	1.1	%/°C	$V_{GS} = 10V, I_{D} = 500mA$	
G <sub>FS</sub>	Forward transductance	225	400	-	mmho	$V_{DS} = 25V, I_{D} = 500mA$	
C <sub>ISS</sub>	Input capacitance	-	50	60		$V_{GS} = 0V$ ,	
C <sub>oss</sub>	Common source output capacitance	-	25	35	pF	$V_{DS} = 25V$ ,	
C <sub>RSS</sub>	Reverse transfer capacitance	-	4.0	8.0		f = 1.0MHz	
t <sub>d(ON)</sub>	Turn-on delay time	-	2.0	5.0			
t <sub>r</sub>	Rise time	-	3.0	5.0	ns	$V_{DD} = 25V,$ $I_{D} = 1.0A,$	
t <sub>d(OFF)</sub>	Turn-off delay time	-	6.0	7.0	115	$R_{GEN} = 25\Omega$	
t <sub>f</sub>	Fall time	-	3.0	6.0		GEN	
$V_{\text{SD}}$	Diode forward voltage drop		1.0	1.5	V	$V_{GS} = 0V$ , $I_{SD} = 500$ mA	
t <sub>rr</sub>	Reverse recovery time	-	400	-	ns	$V_{GS} = 0V$ , $I_{SD} = 500$ mA	

#### Notes:

- 1. All D.C. parameters 100% tested at 25°C unless otherwise stated. (Pulse test: 300µs pulse, 2% duty cycle.)
- 2. All A.C. parameters sample tested.


# **Switching Waveforms and Test Circuit**

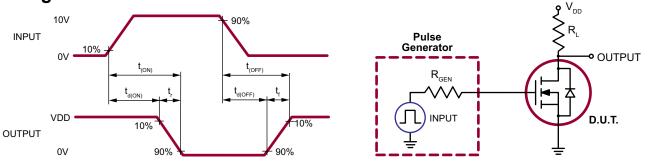



Supertex inc. • 1235 Bordeaux Drive, Sunnyvale, CA 94089 • Tel: 408-222-8888 • www.supertex.com


 $<sup>\</sup>uparrow$   $I_D$  (continuous) is limited by max rated  $T_i$ .


## **Typical Performance Curves**



















## **Typical Performance Curves** (cont.)

















# 3-Lead TO-92 Package Outline (N3)





**Front View** 

**Side View** 



Symbol		Α	b	С	D	E	E1	е	e1	L
Dimensions (inches)	MIN	.170	.014 <sup>†</sup>	.014 <sup>†</sup>	.175	.125	.080	.095	.045	.500
	NOM	-	-	-	-	-	-	-	-	-
	MAX	.210	.022 <sup>†</sup>	.022 <sup>†</sup>	.205	.165	.105	.105	.055	.610*

JEDEC Registration TO-92.

Drawings not to scale.

Supertex Doc.#: DSPD-3TO92N3, Version E041009.

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to <a href="http://www.supertex.com/packaging.html">http://www.supertex.com/packaging.html</a>.)

**Supertex inc.** does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: http://www.supertex.com)

©2011 **Supertex inc.** All rights reserved. Unauthorized use or reproduction is prohibited.



<sup>\*</sup> This dimension is not specified in the JEDEC drawing.

<sup>†</sup> This dimension differs from the JEDEC drawing.