

## SERIES: VHK75W | DESCRIPTION: DC-DC CONVERTER

### FEATURES


- up to 75 W isolated output
- rugged metal enclosure with integrated heat sink
- 4:1 input range (9~36 Vdc, 18~75 Vdc)
- single output from 3.3~48 Vdc
- 1,500 Vdc isolation
- over current, over temperature, over voltage, and short circuit protections
- remote on/off
- efficiency up to 84%



| MODEL           | input<br>voltage<br>range<br>(Vdc) | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br><br>typ<br>(%) |
|-----------------|------------------------------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|------------------------------|
| VHK75W-Q24-S3R3 | 9 ~ 36                             | 3.3                        | 15.0                            | 50                            | 100                                                | 77.0                         |
| VHK75W-Q24-S5   | 9 ~ 36                             | 5                          | 15.0                            | 75                            | 100                                                | 80.0                         |
| VHK75W-Q24-S12  | 9 ~ 36                             | 12                         | 6.25                            | 75                            | 150                                                | 81.5                         |
| VHK75W-Q24-S15  | 9 ~ 36                             | 15                         | 5.0                             | 75                            | 150                                                | 82.5                         |
| VHK75W-Q24-S24  | 9 ~ 36                             | 24                         | 3.12                            | 75                            | 240                                                | 83.0                         |
| VHK75W-Q24-S48  | 9 ~ 36                             | 48                         | 1.56                            | 75                            | 480                                                | 80.0                         |
| VHK75W-Q48-S3R3 | 18 ~ 75                            | 3.3                        | 15.0                            | 50                            | 100                                                | 78.0                         |
| VHK75W-Q48-S5   | 18 ~ 75                            | 5                          | 15.0                            | 75                            | 100                                                | 81.0                         |
| VHK75W-Q48-S12  | 18 ~ 75                            | 12                         | 6.25                            | 75                            | 150                                                | 82.5                         |
| VHK75W-Q48-S15  | 18 ~ 75                            | 15                         | 5.0                             | 75                            | 150                                                | 83.5                         |
| VHK75W-Q48-S24  | 18 ~ 75                            | 24                         | 3.12                            | 75                            | 240                                                | 84.0                         |
| VHK75W-Q48-S48  | 18 ~ 75                            | 48                         | 1.56                            | 75                            | 480                                                | 82.0                         |

Note: 1. Ripple and noise are measured at full load, 20 MHz BW with 10µF tantalum capacitor and 1µF ceramic capacitor across output. The 48 Vdc output models only require the 1µF ceramic capacitor across the output.

### PART NUMBER KEY

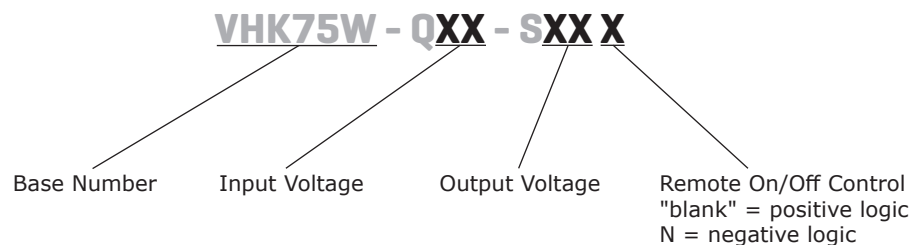

## INPUT

| parameter                  | conditions/description                                                         |                                   | min | typ          | max | units      |
|----------------------------|--------------------------------------------------------------------------------|-----------------------------------|-----|--------------|-----|------------|
| operating input voltage    | 24 Vdc input models                                                            |                                   | 9   | 24           | 36  | Vdc        |
|                            | 48 Vdc input models                                                            |                                   | 18  | 48           | 75  | Vdc        |
| under voltage shutdown     | 24 Vdc input                                                                   | power up<br>power down            |     | 8.8<br>8.0   |     | Vdc<br>Vdc |
|                            | 48 Vdc input                                                                   | power up<br>power down            |     | 17.0<br>16.0 |     | Vdc<br>Vdc |
| remote on/off <sup>1</sup> | positive logic                                                                 | models ON (REM pin open circuit)  |     |              |     |            |
|                            |                                                                                | models OFF (REM pin 0~0.8 Vdc)    |     |              |     |            |
|                            | negative logic                                                                 | models ON (REM pin 0~0.8 Vdc)     |     |              |     |            |
|                            |                                                                                | models OFF (REM pin open circuit) |     |              |     |            |
| filter                     | pi filter                                                                      |                                   |     |              |     |            |
| input fuse                 | 15A time delay fuse for 24 Vin models,<br>8A time delay fuse for 48 Vin models |                                   |     |              |     |            |

Note: 1. Open collector refer to -Vin

## OUTPUT

| parameter                    | conditions/description               |  | min | typ   | max    | units |
|------------------------------|--------------------------------------|--|-----|-------|--------|-------|
| maximum capacitive load      | 3.3 and 5 V output models            |  |     |       | 15,000 | μF    |
|                              | 12 V output models                   |  |     |       | 6,250  | μF    |
|                              | 15 V output models                   |  |     |       | 5,000  | μF    |
|                              | 24 V output models                   |  |     |       | 3,120  | μF    |
|                              | 48 V output models                   |  |     |       | 1,560  | μF    |
| line regulation <sup>2</sup> | measured from high line to low line  |  |     |       | ±0.2   | %     |
| load regulation <sup>2</sup> | measured from full load to zero load |  |     |       | ±0.2   | %     |
| voltage accuracy             |                                      |  |     |       | ±1     | %     |
| adjustability                |                                      |  |     | ±10   |        | %     |
| switching frequency          |                                      |  |     | 300   |        | kHz   |
| transient response           | 25% step load change                 |  |     |       | 500    | μs    |
| temperature coefficient      |                                      |  |     | ±0.03 |        | %/°C  |

Note: 2. A 47 μF aluminum capacitor is required on the output for 48 Vdc output models.

## PROTECTIONS

| parameter                   | conditions/description   |  | min | typ | max | units |
|-----------------------------|--------------------------|--|-----|-----|-----|-------|
| short circuit protection    | continuous               |  |     |     |     |       |
| over current protection     | % nominal output current |  | 110 |     | 160 | %     |
| over voltage protection     |                          |  | 115 |     | 140 | %     |
| over temperature protection | shutdown                 |  |     | 100 |     | °C    |
|                             | restart threshold        |  |     | 70  |     | °C    |

## SAFETY AND COMPLIANCE

| parameter            | conditions/description                                          |  | min   | typ | max | units |
|----------------------|-----------------------------------------------------------------|--|-------|-----|-----|-------|
| isolation voltage    | for 1 minute: input to output; input to case;<br>output to case |  | 1,500 |     |     | Vdc   |
| isolation resistance |                                                                 |  | 10    |     |     | MΩ    |
| RoHS                 | yes                                                             |  |       |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description |  | min | typ | max | units |
|-----------------------|------------------------|--|-----|-----|-----|-------|
| operating temperature | see derating curve     |  | -40 |     | 85  | °C    |
| storage temperature   |                        |  | -55 |     | 105 | °C    |


MECHANICAL

| parameter     | conditions/description                       | min | typ | max | units |
|---------------|----------------------------------------------|-----|-----|-----|-------|
| dimensions    | 4.23 x 4.01 x 1.50 [107.5 x 101.8 x 38.0 mm] |     |     |     | inch  |
| case material | steel and aluminum extrusion                 |     |     |     |       |
| weight        |                                              |     | 502 |     | g     |


MECHANICAL DRAWING

units: inch[mm]  
general tolerance: ±0.04[±1.0]  
  
wire range: 22~12 AWG  
screw size: #6-32  
connector tightening torque: 1.4 N·m (max)


| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | -Vo      |
| 2               | -S       |
| 3               | trim     |
| 4               | +S       |
| 5               | +Vo      |
| 6               | case     |
| 7               | REM      |
| 8               | -Vin     |
| 9               | +Vin     |

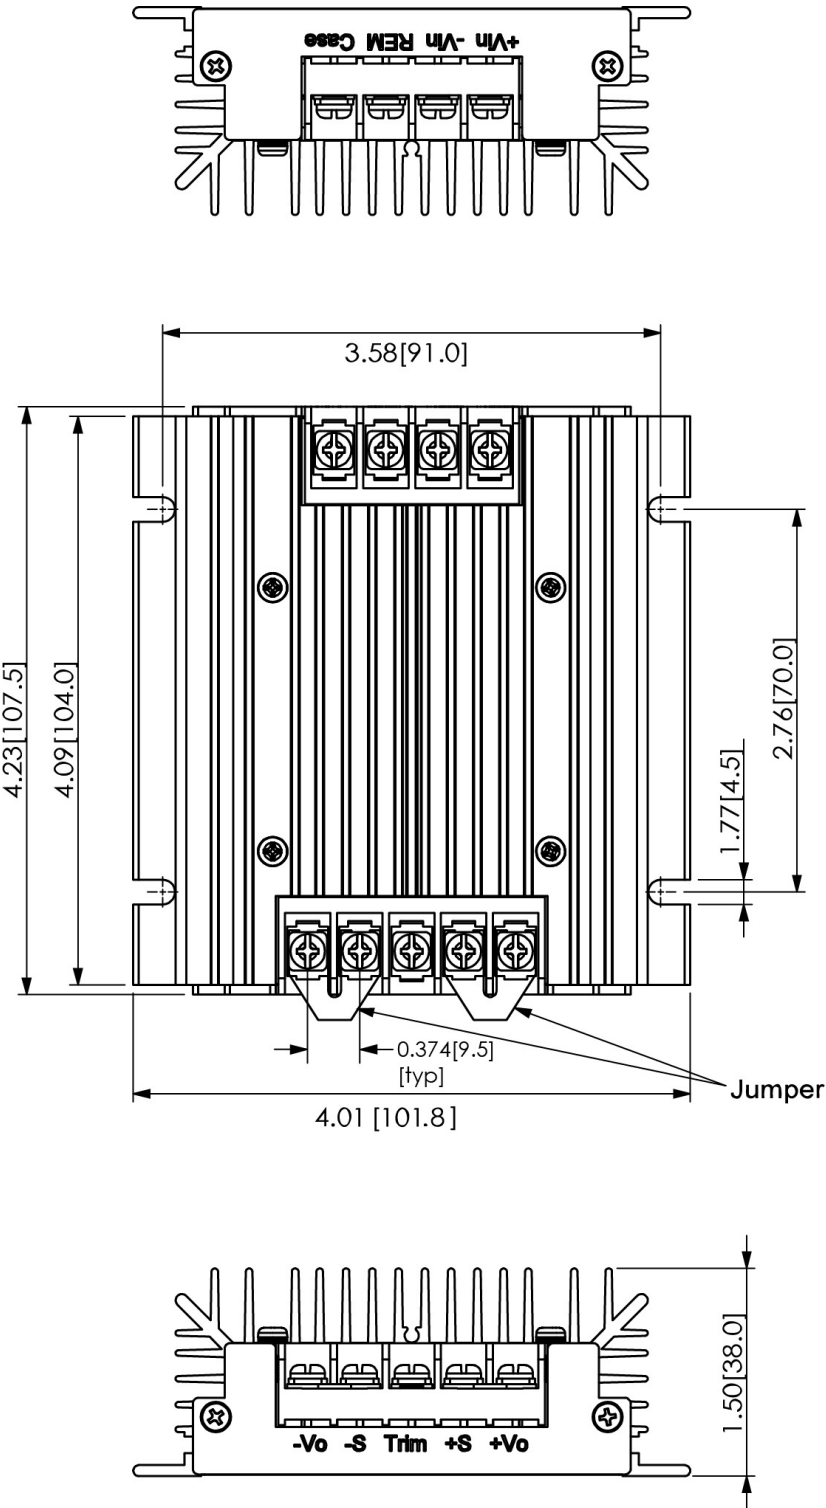

DERATING CURVES

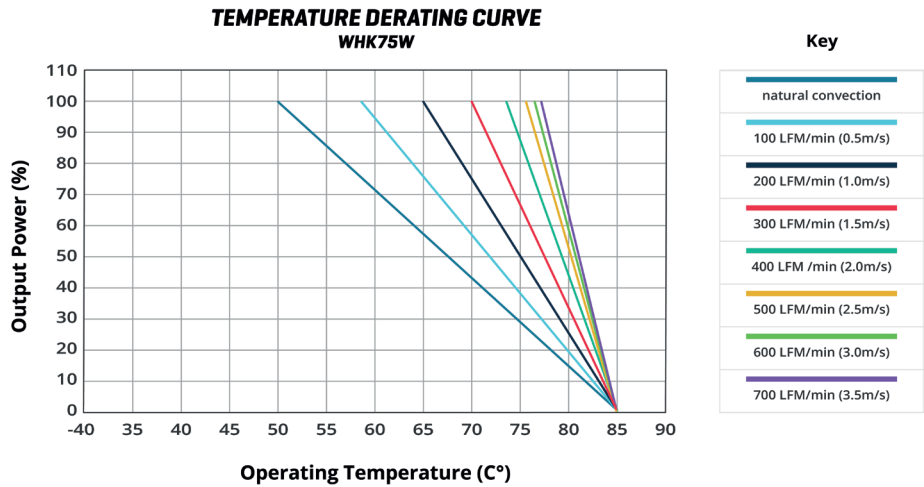

TEST CONFIGURATION

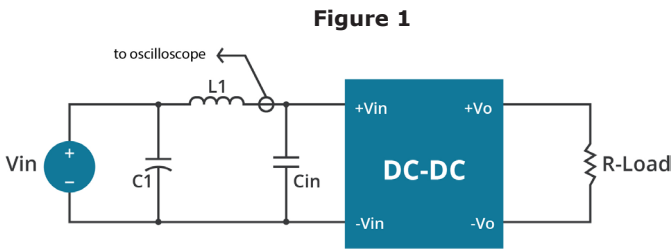


**Table 1**

| External components |                                            |
|---------------------|--------------------------------------------|
| L1                  | 12 $\mu$ H                                 |
| C1                  | 220 $\mu$ F, ESR < 0.1 $\Omega$ at 100 KHz |
| Cin                 | 100 $\mu$ F, ESR < 0.1 $\Omega$ at 100 KHz |

Note: Input reflected-ripple current is measured with an inductor L1 and Capacitor C1 to simulate source impedance.

EMC RECOMMENDED CIRCUITS

EN55022 CLASS A

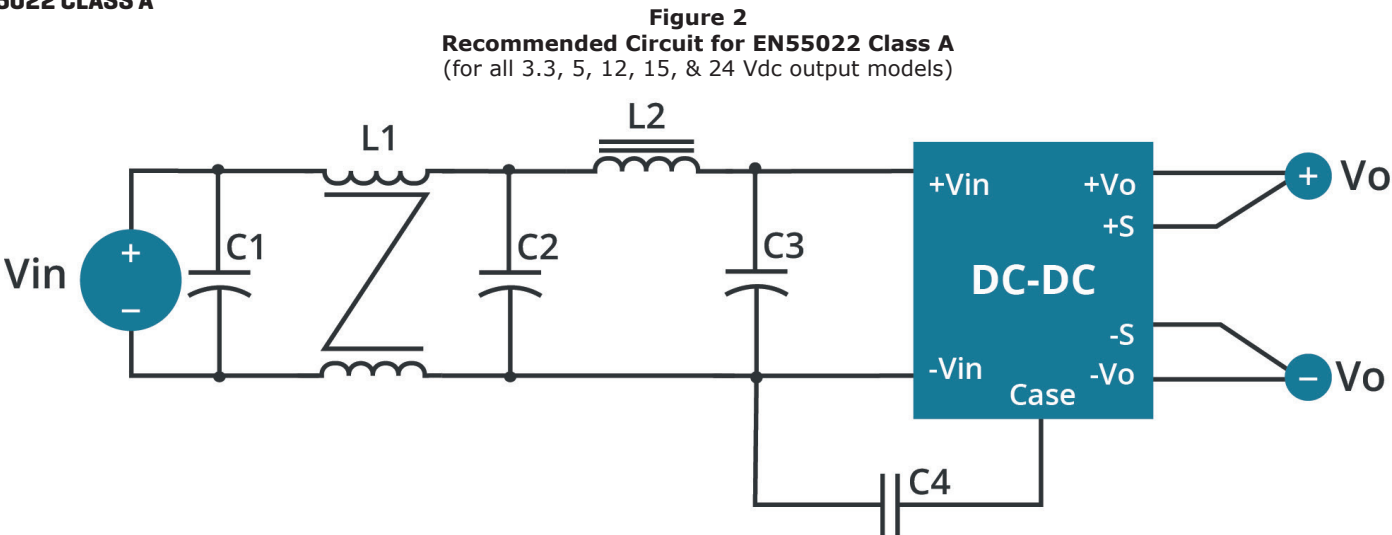

EMC RECOMMENDED CIRCUITS (CONTINUED)

EN55022 CLASS A

Figure 3  
Recommended Circuit for EN55022 Class A  
(for all 48 Vdc output models)

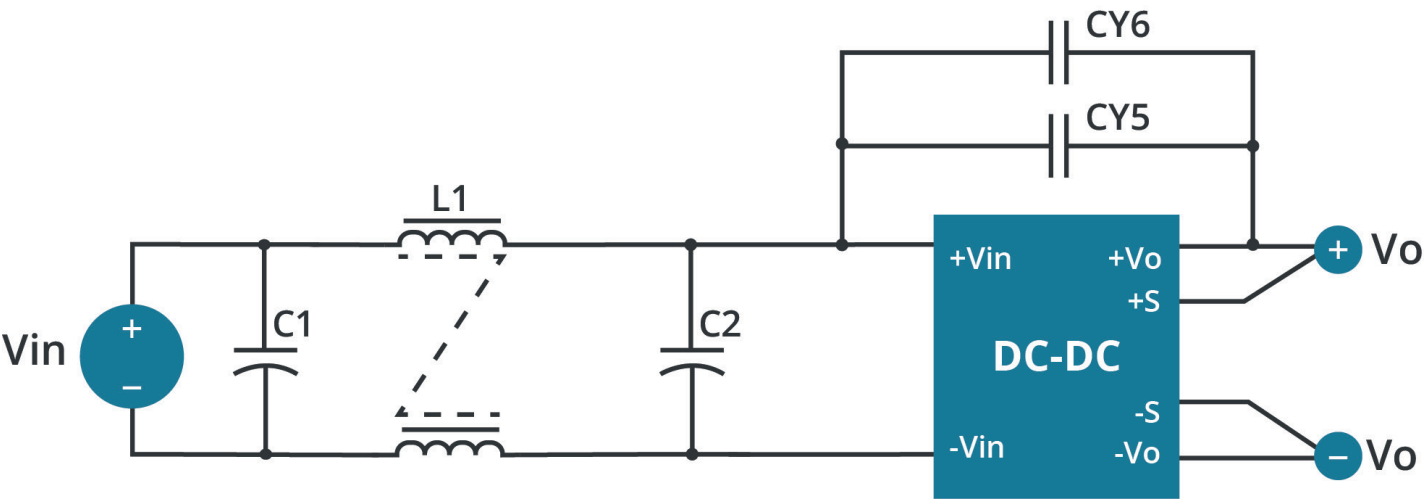


Table 2  
Class A Recommended Components

| Model           | C1 <sup>1</sup> | C2 <sup>1</sup> | C3 <sup>1</sup> | C4 <sup>2</sup> | CY5 <sup>2</sup> | CY6 <sup>2</sup> | L1       | L2     |
|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|----------|--------|
| VHK75W-Q24-S3R3 | NC              | 47 µF/50 V      | 47 µF/50 V      | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q24-S5   | NC              | 47 µF/50 V      | 47 µF/50 V      | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q24-S12  | NC              | 47 µF/50 V      | 47 µF/50 V      | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q24-S15  | NC              | 47 µF/50 V      | 47 µF/50 V      | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q24-S24  | NC              | 100 µF/50 V     | 100 µF/50 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q24-S48  | 220 µF/50 V     | 100 µF/50 V     | NC              | NC              | 1000 pF/2 kV     | 1000 pF/2 kV     | 0.223 mH | NC     |
| VHK75W-Q48-S3R3 | NC              | 47 µF/100 V     | 47 µF/100 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q48-S5   | NC              | 47 µF/100 V     | 47 µF/100 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q48-S12  | NC              | 47 µF/100 V     | 47 µF/100 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q48-S15  | NC              | 47 µF/100 V     | 47 µF/100 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q48-S24  | NC              | 47 µF/100 V     | 47 µF/100 V     | 2200 pF/2 kV    | NC               | NC               | Short    | 3.4 µH |
| VHK75W-Q48-S48  | 56 µF/100 V     | 39 µF/100 V     | NC              | NC              | 1000 pF/2 kV     | 470 pF/2 kV      | 0.223 mH | NC     |

Note: 1. Aluminum capacitors.  
2. Ceramic capacitors.

EMC RECOMMENDED CIRCUITS (CONTINUED)

EN55022 CLASS B

Figure 4  
Recommended Circuit for EN55022 Class B  
(for all 3.3, 5, 12, & 15 Vdc output models as well as VHK75W-Q48-S24)

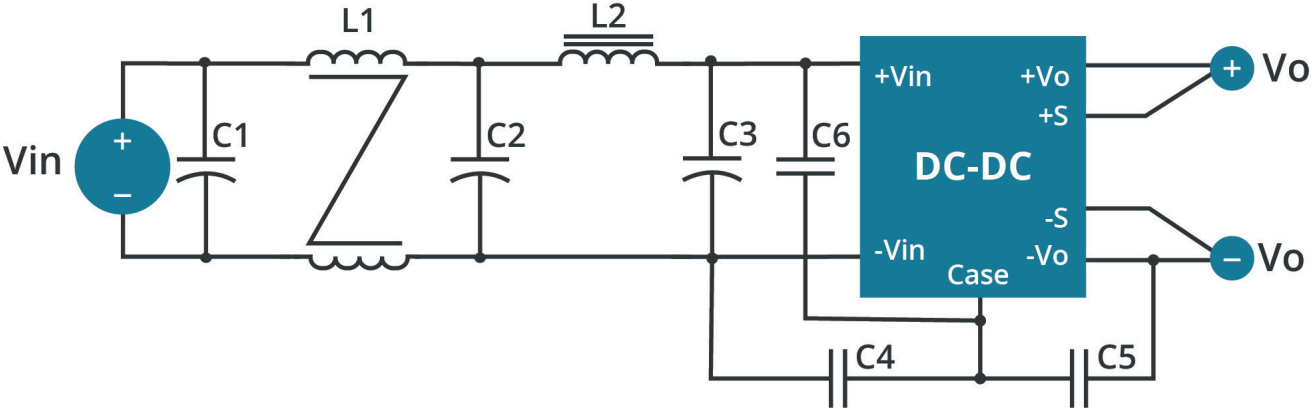


Figure 5  
Recommended Circuit for EN55022 Class B  
(for VHK75W-Q24-S24)

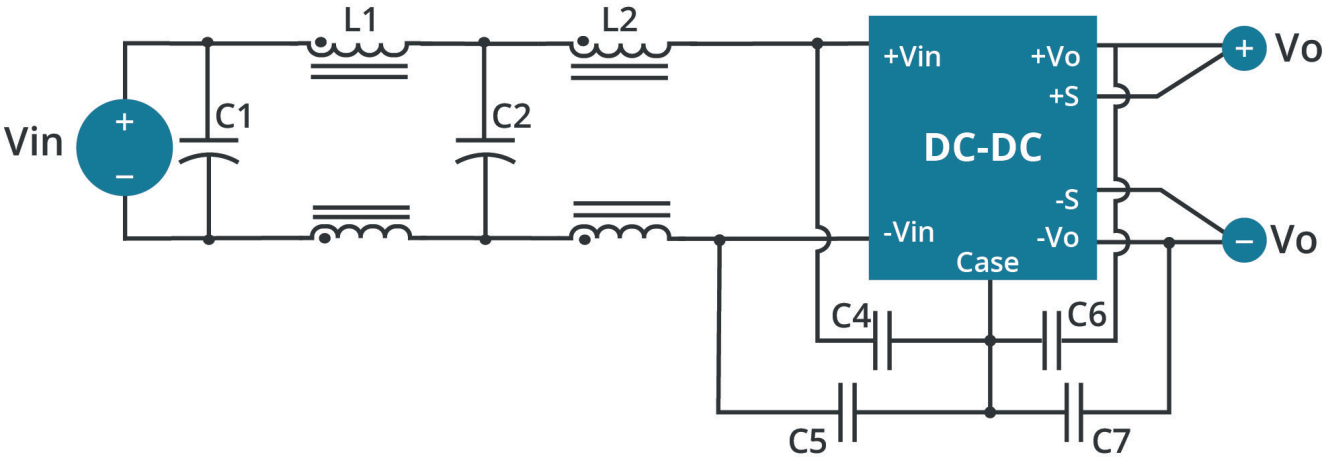


Table 3  
Class B Recommended Components  
(for all 3.3, 5, 12, 15, & 24 Vdc output models)

| Model           | C1 <sup>1</sup>  | C2 <sup>1</sup>  | C3 <sup>1</sup>  | C4 <sup>2</sup> | C5 <sup>2</sup> | C6 <sup>2</sup> | C7 <sup>2</sup> | L1      | L2          |
|-----------------|------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|---------|-------------|
| VHK75W-Q24-S3R3 | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 3300 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q24-S5   | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 2200 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q24-S12  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 3300 pF/2 kV    | 1000 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q24-S15  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 47 $\mu$ F/50 V  | 2200 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q24-S24  | 100 $\mu$ F/50 V | 100 $\mu$ F/50 V | NC               | 1000 pF/2 kV    | 1000 pF/2 kV    | 1000 pF/2 kV    | 1000 pF/2 kV    | 0.12 mH | 0.34 mH     |
| VHK75W-Q48-S3R3 | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 3300 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q48-S5   | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 3300 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q48-S12  | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 3300 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q48-S15  | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 3300 pF/2 kV    | 3300 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |
| VHK75W-Q48-S24  | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 47 $\mu$ F/100 V | 2200 pF/2 kV    | 2200 pF/2 kV    | 1000 pF/2 kV    | NC              | 1.5 mH  | 3.4 $\mu$ H |

Note: 1. Aluminum capacitors.  
2. Ceramic capacitors.

EMC RECOMMENDED CIRCUITS (CONTINUED)

EN55022 CLASS B

Figure 6  
Recommended Circuit for EN55022 Class B  
(for all 48 V output models)

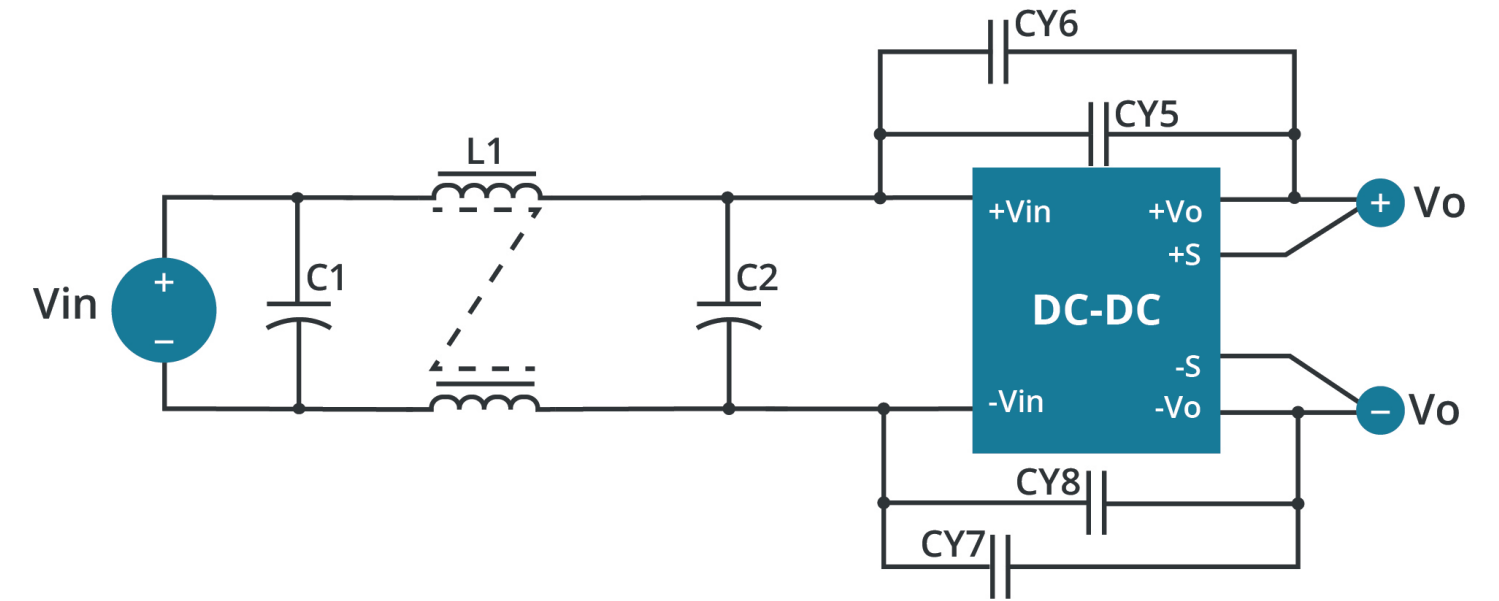


Table 4  
Class B Recommended Components  
(for all 48 V output models)

| Model          | C1 <sup>1</sup>  | C2 <sup>1</sup>  | CY5 <sup>2</sup> | CY6 <sup>2</sup> | CY7 <sup>2</sup> | CY8 <sup>2</sup> | L1       |
|----------------|------------------|------------------|------------------|------------------|------------------|------------------|----------|
| VHK75W-Q24-S48 | 220 $\mu$ F/50 V | 220 $\mu$ F/50 V | 1500 pF/2 kV     | 1000 pF/2 kV     | 1000 pF/2 kV     | 1000 pF/2 kV     | 0.223 mH |
| VHK75W-Q48-S48 | 56 $\mu$ F/100 V | 56 $\mu$ F/100 V | 1000 pF/2 kV     | 1000 pF/2 kV     | 1000 pF/2 kV     | 1000 pF/2 kV     | 0.223 mH |

Note: 1. Aluminum capacitors.  
2. Ceramic capacitors.


## APPLICATION NOTES

### 1. Output Voltage Trimming


Leave open if not used.

Figure 7

Trim up

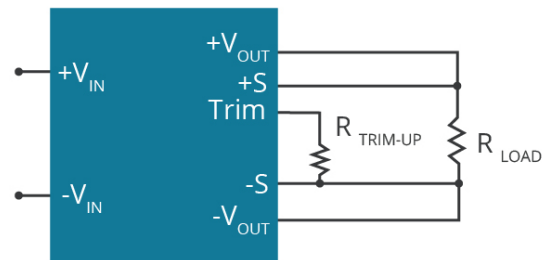

Trim down

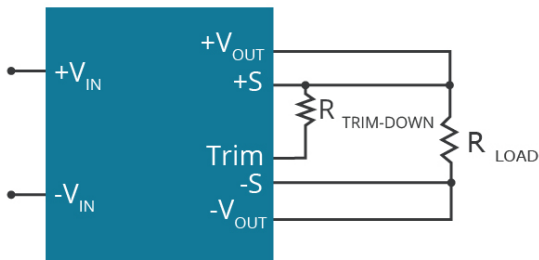

$$R_{\text{TRIM}} = \left( \frac{R_{\text{TOP}} (V_{\text{REF}} - V_F \left( \frac{R_{\text{BOTTOM}}}{R_{\text{BOTTOM}} + R_O} \right))}{V_{\text{OUT}} - V_{\text{OUT, NOM}}} \right) - \frac{R_{\text{BOTTOM}} R_O}{R_{\text{BOTTOM}} + R_O} \quad (\text{K } \Omega)$$

Formula for Trim up

$$R_{\text{TRIM}} = \frac{R_{\text{TOP}} (V_{\text{OUT}} - V_{\text{REF}})}{V_{\text{OUT, NOM}} - V_{\text{OUT}}} - R_{\text{BOTTOM}} \quad (\text{K } \Omega)$$

Formula for Trim down

Table 5

| $V_{\text{NOM}}$ | $R_{\text{TOP}}$ | $R_{\text{BOTTOM}}$ | $R_O$         | $V_{\text{REF}}$ | $V_F$ |
|------------------|------------------|---------------------|---------------|------------------|-------|
| (Vdc)            | (k $\Omega$ )    | (k $\Omega$ )       | (k $\Omega$ ) | (V)              | (V)   |
| 3.3              | 3                | 12                  | 18            | 1.24             | 0.46  |
| 5                | 2.32             | 8.2                 | 0             | 2.5              | 0     |
| 12               | 9.1              | 51                  | 18            | 2.5              | 0.46  |
| 15               | 12               | 82                  | 18            | 2.5              | 0.46  |
| 24               | 20               | 100                 | 20            | 2.5              | 0.46  |
| 48               | 36               | 270                 | 14            | 3.085            | 1.15  |

Note: Value for  $R_{\text{TOP}}$ ,  $R_{\text{BOTTOM}}$ ,  $R_O$ ,  $V_{\text{REF}}$ , and  $V_F$  refer to Table 5 (fixed internal values).

$R_{\text{TRIM}}$ : Trim resistance

a: User-defined parameter, no actual meanings

$V_{\text{NOM}}$ : Nominal output voltage

$V_{\text{OUT}}$ : Target output voltage



REVISION HISTORY

| rev. | description                                          | date       |
|------|------------------------------------------------------|------------|
| 1.0  | initial release                                      | 03/28/2007 |
| 1.01 | new template applied                                 | 12/21/2011 |
| 1.02 | misc. updates and corrections                        | 03/13/2012 |
| 1.03 | updated mechanical drawing                           | 03/27/2012 |
| 1.04 | V-Infinity branding removed                          | 06/27/2012 |
| 1.05 | updated spec                                         | 03/14/2013 |
| 1.06 | added trimming and EMI information                   | 12/16/2013 |
| 1.07 | company logo updated                                 | 02/08/2021 |
| 1.08 | pin connection table & remote on/off updated         | 04/29/2021 |
| 1.09 | derating curve and circuit figures updated           | 09/06/2021 |
| 1.10 | tolerances updated in the mechanical drawing section | 01/05/2022 |
| 1.11 | mechanical tolerance updated                         | 04/13/2022 |
| 1.12 | output voltage trimming updated                      | 05/23/2023 |
| 1.13 | company address updated                              | 11/14/2024 |
| 1.14 | datasheet updated                                    | 05/02/2025 |

The revision history provided is for informational purposes only and is believed to be accurate.

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.