

The DSP-100 CableMeter®

- Delivers TSB-67 Accuracy Level II for Basic Link and Channel as classified by Underwriters Laboratories, Inc. (UL)
- Provides auto-diagnostics of cabling faults in graphical and text representations
- Tests NEXT to 155 MHz
- Performs two-way tests with optional Smart Remote
- Detects/excludes sources of noise from NEXT measurements
- Provides fast test times: completes test of a 4-pair Cat 5 cable in 17 seconds
- Stores 1,150 TIA TSB-67 test results and 600 ISO test results
- Monitors traffic on 10BASE-T networks to help you identify whether the cable link is the source of the problem
- Tests a wide variety of LAN cabling systems: UTP, FTP, STP (IBM type 1,2,6,9), Coax
- Includes free Windows®-based DSP-LINK software—the quick and easy way to upload cable test results to your PC
- Has a back-lit display for hard-to-see locations

DSP-100 Digital CableMeter®

Certify cabling quickly and accurately

Whether you're certifying a cabling plant, troubleshooting a problem, or re-certifying moves, adds, and changes, the DSP-100 CableMeter can make the job faster and easier. In fact, with this powerful *digital* cable tester from the Fluke DSP Series, you can measure a cable in a record-breaking 17 seconds, without sacrificing accuracy.


Based on Fluke's superior digital test technology, the DSP-100 fully complies with all current test standards. It also offers powerful diagnostic capabilities such as the "Time Domain Crosstalk (TDX™) Analyzer," which quickly pinpoints subtle defects resulting from bad connections, poor workmanship, or improper cabling.

Save time on the job

With the DSP-100's intuitive interface, you won't waste time sorting through complex menus. Plus, its 12-hour battery enables you to test all day without stopping. An internal battery backs up your critical test results for up to five years. You can store 1,150 TSB-67 test results or 600 ISO test results and download them to your PC in less than two minutes.

Test fiber optic cables

When paired with the optional Fluke DSP-FTK Fiber Test Kit, the DSP-100 detects bad connections, bad splices, broken fibers, and loss of power from bends and fiber-type mismatches. It precisely measures power loss from fiber optic cables in dB with digital accuracy, and measures optical power in dBm or μ W. The Fiber Test Kit includes an Optical Power Meter (DSP-FOM), a combination 850/1300 nm Fiber Optic Source, patch cords and a coupler. Other laser and power optical sources are also available.

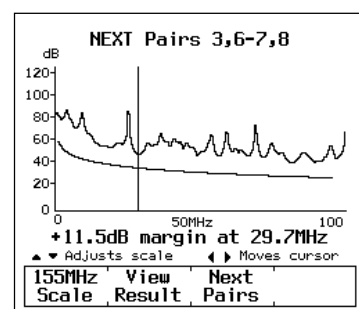

Detailed NEXT results screen shows the measured data as well as the pass/fail limit curve defined by the selected test standard.

Get free DSP-LINK software

Windows®-based DSP-LINK software brings “point and click” simplicity to the task of transferring data or updating your DSP-100; and it's included free with the DSP-100!

It's fast—download all stored test results (600 to more than 2000) from the DSP-100 to a PC in less than two minutes with DSP-LINK.



Manage test results with Fluke Cable Manager™ Software

DSP-100 options include powerful CableManager software that allows you to quickly and easily organize, find, edit, print and save your cable test result information in a database. You can download Autotest reports and sort and search through several fields, such as Cable ID, Site and Pass/Fail.



Specifications

Cable Types: UTP, FTP, ScTP, STP, Coax

Test Standards:

TIA Cat 3, 4, and 5 Basic Link or Channel
ISO11801 Class A, B, C, or D
IEEE 10Base5, 10Base2, or 10base-T
IEEE Token Ring 4 Mbps or 16 Mbps
IEEE 100Base-TX, 100Base-T4
IEEE 802.12 (100VG-AnyLan) 4-UTP or 2-STP
ANSI TP-PMD
Aus/NZ Class C, D Basic Link or Channel

Speed of Autotest: Full Autotest of Category 5 UTP cable, including 6 pair combinations for NEXT in both directions, in less than 17 seconds*

Supported Tests (range of test is determined by network or selected standard)

Wire Map
Length, Propagation Delay, Delay Skew
Attenuation
NEXT, NEXT @ Remote*
Power Sum NEXT, PSNET @ Remote*
Attenuation-to-Crosstalk Ratio (ACR),
ACR @ Remote*
Characteristic Impedance
DC Loop Resistance
Return Loss (RL)

Display: Graphic bit-mapped LCD with back light and adjustable contrast

Test connections: One shielded 8-pin modular connector, (RJ45), and one BNC connector

Input Protection: Protected against continuous telco voltages and 100 mA over-current.

EMC: EMC compliant. CE certification by NMI Certin BV. Number FLK95003.CFT dated on 3-Oct-95.

Power:

Main instrument: Rechargeable NiCad battery with 10-12 hours typical battery life.
Standard remote unit: Replaceable 9V 425 alkaline cell.

Size: 22.5 x 13 x 7.6 cm (9 x 5 x 3 in)

Weight: 1.5 kg (3.25 lb)

Languages Supported: English, Spanish, Italian, French, German, Portuguese, Chinese, Korean and Japanese

*With optional Smart Remote unit

Ordering Information

Model Name	Description
DSP-100*	CableMeter Includes: DSP-100 CableMeter, DSP-100 Standard Remote, DSP-LINK Software, PC Serial Interface Cable, AC Adapter/Charger, Hard Carrying, one coax patch cable, two 2m UTP Cat 5 shielded patch cables, one 10 inch calibration
DSP-R*	Standard Remote for the DSP-100
DSP-SR*	Smart Remote for the DSP-100

*CE approved

See the *Cable Test Accessories Guide* for accessory information



DSP-100 CableMeter main unit and remote.



Fluke. Keeping your world up and running.

Fluke Corporation

PO Box 9090
Everett, WA USA 98206

Fluke Europe B.V.

PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:

U.S.A. (800) 443-5853 or Fax (425) 356-5116
Europe/M-East (31 40) 2 678 200 or Fax (31 40) 2 678 222
Canada (905) 890-7600 or Fax (905) 890-6866
Other countries (425) 356-5500 or Fax (425) 356-5116

E-mail: fluke-info@tc.fluke.com

Web access: <http://www.fluke.com/nettools/>

©1998 Fluke Corporation. All rights reserved. Printed in U.S.A.
Windows is a registered trademark of Microsoft Corporation.
7/98 D0065UEN Rev A