



Solutions

Food and Beverage

Food and Beverage

Solutions for




**Coffee
and vending machines**



**Heating and
cooking equipment**



**Ice makers
and cooling systems**

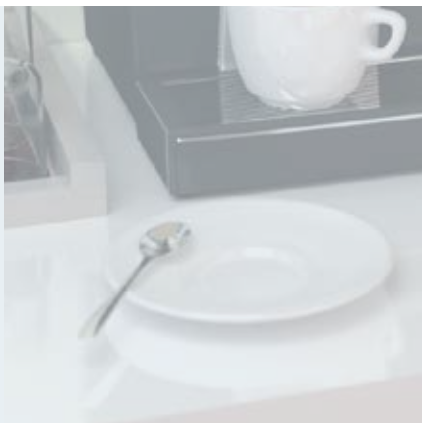

ABOUT CARLO GAVAZZI

Carlo Gavazzi Automation is a multinational electronics group active in designing, manufacturing and marketing of electronic equipment targeted at the global markets of industrial and building automation.

Our history is full of firsts and our products are installed in a huge number of applications all over the world. With more than 80 years of successful operation, our experience is unparalleled.

We have our headquarters in Europe and numerous offices around the world.

Our R&D competence centres and production sites are located in Denmark, Italy, Lithuania, Malta and the People's Republic of China.

We operate worldwide through 22 of our own sales companies and also selected representatives in more than 65 countries, from the United States in the West to the Pacific Rim in the East.

Our core competence in automation spans three product lines: Sensors, Switches and Controls.

Our wide array of products includes sensors, monitoring relays, timers, energy management system, solid state relays, safety devices and fieldbus systems.

We focus our expertise on offering state-of-the-art product solutions in selected market segments.

Our customers include original equipment manufacturers of packaging machines, plastic-injection moulding machines, food and beverage production machines, conveying and material handling equipment, door and entrance control systems, lifts and escalators, as well as heating, ventilation and air conditioning devices.



DESIGNED TO MEET MARKET REQUIREMENTS

With over 40 years of expertise in manufacturing components for food and beverage equipment, Carlo Gavazzi can provide a wide range of advanced and reliable products for commercial heating and cooking equipment, ice making technology and cleaning processes.

Carlo Gavazzi is a market leader in solid state relay technology, offering innovative solutions in very compact dimensions for the control of heater loads. The range of products includes solid state relays for PCB mounting, chassis mounting as well as solutions ready for use with a built-in heatsink.

The number of switching cycles in food and beverage equipment is quite substantial and a reliable switching solution that guarantees a long, maintenance-free lifetime can be provided only with solid state switching.

Carlo Gavazzi sensors are widely used to detect door closure or to check water level in coffee machines.

Food and beverage processes demand equipment capable of working in harsh environments and conditions.

The Carlo Gavazzi range of sensors includes new photoelectric and capacitive types (Ecolab and IP69K approved) capable of withstanding high pressure and steam cleaning.

Monitoring relays, timers, switching power supplies and energy meters complete the range of Carlo Gavazzi products to ensure safe operation and monitoring of equipment, while increasing longevity.

Food and Beverage

Coffee and vending machines



Solid state relays	Solid state relays	Photoelectric sensors	Capacitive sensors	Capacitive level sensors	Magnetic level sensors	Energy analyzers	Monitoring relays
RF1	RAM1A..G RA2A	PD30 PA18 PH18	CD50CNF CA18CA	CD34CNF	ILM ILSP	EM111	DPA52 DPB52 DIB71

Coffee machines, for both domestic and commercial use, must be reliably monitored in order to avoid any damage to the electromechanical elements such as the pump or the electrical resistance. Carlo Gavazzi products provide efficient control and ensure the reliability of equipment.



Level sensors are the best solution to check the water level. The sensor may be installed directly in the bottom of the tank.

Usually, plastic propylene sensors (ILSP, ILM series) are used for this purpose. A second solution consists of a float in the tank controlled by means of magnetic sensors.

The switching of heaters can be carried out reliably with the RF1, RAM1A..G or RA2A series which are fully solid state solutions and hence are not so susceptible to problems concerning contacts and arcing as is the case with electromechanical solutions. The RAM1 and RA2A series are also suitable for motor switching.

In the coffee and vending machine market, the quality of dispensed drinks (hot and cold), reliability, easy cleaning and maintenance are the keys for success.

In coffee machines, the PD30 sensors with background suppression detect the cups to prevent coffee spillage. The CD50 sensors detect the level of coffee beans while the CD34, designed for water-based liquids, can ignore any residual film, moisture or foam.

Heating and cooking equipment



Solid state relays

RF1

Solid state relays

**RAM1A..G
RM1A**

Solid state relays

**RK2
RKD2**

Solid state contactors

**RGC1A
RGC2A
RGC3A**

Proportional controllers

**RGC3P
RGC2P**

Safety magnetic sensors

**SMS
CLS**

Switching power supplies

**SPD
SPPC**

Energy analyzers

EM340

Manufacturers of cooking equipment such as ovens, griddles, steamers and toasters need to ensure food quality and safety, improving production processes and ensuring long operating lifetime.

Global legislation enforces restrictions and bans on the use of mercury. Carlo Gavazzi solid state relays and contactors are RoHS compliant and are mercury free.

They can operate in humid conditions without being affected by vapors that may be present in the surrounding environment.

The Carlo Gavazzi solid state solutions integrate protection against uncontrolled transients and over

voltages to guarantee reliable operation.

Additionally, the materials used for the RF1, RAM1A..G, RK and RG conform to the glow wire requirements of IEC/EN 60335-1 (Safety of Household and Similar Electrical Appliances).

The RF1, RK and RG series offer the possibility of panel space optimization. The RF1 occupies only 30% of the space required by other panel mount solid state relays, RG solutions are available in a width as small as 17.5 mm and the RK houses 2 poles in one platform providing up to 50% space savings.

The RGCxP series enables analog inputs to be connected directly to the relay when it is necessary to control the

output power in proportion to the level of control input.

Machinery protection from voltage surges, overcurrent or phase loss is ensured by Carlo Gavazzi compact monitoring relays, thus prolonging their lifetime.



Food and Beverage

Ice makers and cooling systems



Photoelectric sensors	Inductive proximity sensors	Timers	Capacitive sensors	Capacitive level sensors	Soft starters	Energy analyzers	Digital panel meters
PA18 PH18	IA08 ICS08	HAA08 HAA14 FMB01	CD50CNF	CD34CNF	RSWT RSGD	EM340 EM112	UDM 40 LDM 40

Thanks to the progress in energy efficiency, reduced size and low refrigerant charge there are many applications of ice making technology, with millions of ice makers around the world. You can find ice makers in hotels, bars and restaurants as well as in hospitals, laboratories, supermarkets and in the food industry.


The wide range of inductive, capacitive, photoelectric and ultrasonic sensors by Carlo Gavazzi includes some types suitable to be installed in ice makers. An inductive sensor - specifically designed for this application - detects low speed of the gear motor, sending a signal to the PC board which stops the ice machine operation.

Carlo Gavazzi photoelectric sensors can be used for ice level control. The sensor will send signal to the P.C. board to stop the machine when a beam of light sent by the optical device is shielded by ice. The ice machine will stop making ice before the bin or dispenser is full.

Capacitive sensors also enable accurate control of water levels by sending a water-fill signal to the controller. RSWT and RSGD soft starters are also used to soft start and soft stop high pressure pumps in industrial washing equipment.



Conveying, filling and cleaning processes

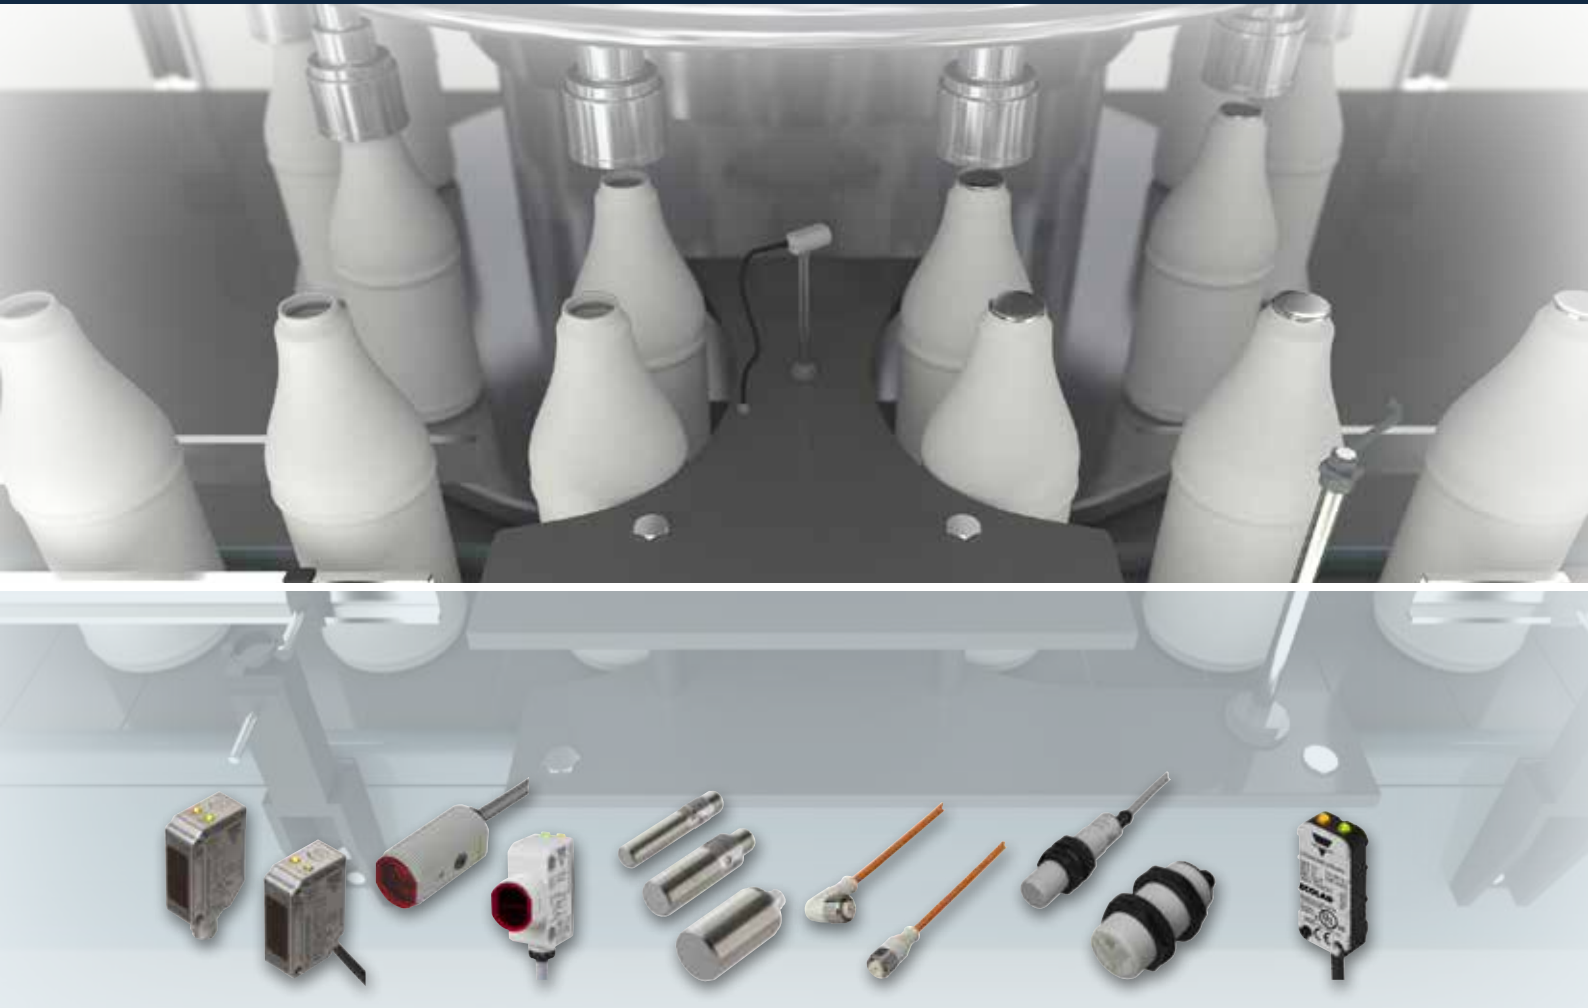

Photoelectric sensors

PD30ET

Photoelectric sensors

**PA18
PH18**

Inductive proximity sensors

**ICS12
ICS18
ICS30**

Cordsets

**CONB14NF
CONB54NF**

Capacitive sensors

**CA18CAN/CAF
CA30CAN/CAF**

Capacitive level sensors

CD34CNF

The food industry requires a high level of hygiene and cleanliness in equipment that has to withstand daily wash-down at high temperatures, high pressure cleaning and harsh detergents.

The PD30ET stainless steel sensors work perfectly even in the harshest environments (e.g. in detecting the presence of meat or meat trays on a conveyor system). The sturdy stainless steel housing (AISI316L) together with high-quality plastic materials such as PEEK, PPSU, and PES sealings of FKM, guarantee outstanding mechanical resistance. These sensors are built to withstand cleaning with water at 80°C (176°F), high pressure washing up to 100 bar (1,450 psi) and to resist alkaline and acidic cleaning agents.

They are IP69K and Ecolab certified.

The PD30 background suppression sensors detect all lid colours on objects at the same distance from the sensor, and their durable design withstands daily cleaning processes.

The PA/PH18 sensor series is another solution for applications where harsh cleaning methods are required. The photoelectric sensors - PA18 series - comply with the requirements set out by Ecolab, IP67, IP69K. Offered in a compact M18 threaded ABS housing, this sensor series is available in both axial (straight) and radial (90° right angled) versions.

The Carlo Gavazzi ICS series of inductive proximity sensors also

the ideal solution for demanding applications characterized by harsh environmental conditions. The Ecolab certification guarantees resistance to industrial cleaning agents, such as alkaline or chlorine foam and acid foam disinfectants. The material used for the plastic cap is FDA certified.



Food and Beverage

Our product range

1-phase solid state relays



RF1

- Dimensions: 36 x 21 x 24 mm, panel mount
- Rated operational voltage: up to 280 VAC
- Rated current: up to 25 AAC
- Control input: 5 VDC, 12 VDC, 24 VDC
- Approvals/Marks: CE - cURus - CSA - VDE

MAIN FEATURES

- Zero cross or Random switching
- Suited for resistive loads
- Integrated output overvoltage protection

1-phase solid state relays



RM1A

- Dimensions: 58.2 x 44.8 x 28.8 mm, panel mount
- Rated operational voltage: up to 660 VAC
- Rated current: 25 AAC, 50 AAC, 75 AAC, 100 AAC
- Control input: 4-32 VDC, 20-280 VAC
- Approvals/Marks: CE - cURus - CSA - EAC - CCC

MAIN FEATURES

- Zero cross or Random switching
- Integrated output overvoltage protection
- 1400 Vp blocking voltage

1-phase solid state relays



RAM1A..G

- Dimensions: 58.2 x 44.8 x 28.8 mm, panel mount
- Rated operational voltage: up to 660 VAC
- Rated current: 25 AAC, 50 AAC, 100 AAC, 125 AAC
- Control input: 4-32 VDC, 20-280 VAC
- Approvals/Marks: CE - cURus - CSA - EAC - CCC - VDE

MAIN FEATURES

- Zero cross switching
- Integrated output overvoltage protection
- Certified to EN 60335 glow wire requirements

2-pole solid state relays



RA2A / RA2A..C

- Dimensions: 57.8 x 44.5 x 31.7 mm, panel mount
- Rated operational voltage: up to 660 VAC
- Rated current per pole: up to 40 AAC
- Control input: 4-32 VDC
- Approvals/Marks: CE - cURus - CSA

MAIN FEATURES

- 2 separately controlled relays in a compact platform
- Zero cross switching
- LED per pole for control status indication

2-pole solid state relays



RK

- Dimensions: 45 x 58 x 33 (44) mm, panel mount
- Independent control (RKD2..) or common control (RK2..)
- Ratings: up to 660 VAC, 50 AAC /pole, 75 AAC /pole
- Control input: 4-32 VDC
- Approvals/Marks: CE - cURus - CSA - VDE

MAIN FEATURES

- Integrated output overvoltage protection
- Pre-attached thermal pad
- Conformant to EN 60335-1

1-phase solid state relays



RGS1A

- Dimensions: 90 x 17.8 x 51 mm, panel mount
- Ratings: up to 660 VAC, 90 AAC, 18,000 A²s
- Integrated output overvoltage protection
- Control input: 4-32 VDC, 20-275 VAC (24-190 VDC)
- Approvals/Marks: CE - cURus - CSA - EAC - VDE - GL (50 AAC)

MAIN FEATURES

- Zero cross or Random switching
- 100 kA short circuit current rating
- Certified as a motor switching device

Our product range

1-phase solid state contactors



RGC1A

- Product width 17.5 mm up to 70 mm, DIN or panel mount
- Ratings: up to 660 VAC, 85 AAC, 18,000 A²s
- Integrated output overvoltage protection
- Control input: 4-32 VDC, 20-275 VAC (24-190 VDC)
- Approvals/Marks: CE - cULus - EAC - VDE - GL (up to 30 AAC)

MAIN FEATURES

- Zero cross or Random switching
- 100 kA short circuit current rating
- Optional integrated overtemperature protection

3-phase solid state contactors



RGC2A / RGC3A

- Product width up to 70 mm, DIN rail mount
- Ratings: up to 660 VAC, 75 AAC (RGC2A), 65 AAC (RGC3A) @ 40°C
- Motor ratings up to 11 kW @ 400 VAC, 25 HP @ 600 VAC
- Control input: 5-32 VDC, 20-275 VAC (24-190 VDC)
- Approvals/Marks: CE - cULus - EAC - CCC

MAIN FEATURES

- 3-phase; 2-pole or 3-pole switching
- Optional monitoring for load and SSR malfunction
- 100 kA short circuit current rating

3-phase proportional controllers



RGC2P / RGC3P

- Product width up to 70 mm, DIN rail mount
- Rated operational voltage: 180 - 660 VAC
- Rated current: up to 75 AAC (RGC2P), 65 AAC (RGC3P) @ 40°C
- Control input: 0-20 mA, 4-20 mA, 12-20 mA, 0-10 V, 0-5 V, 1-5 V, external potentiometer
- Approvals/Marks: CE - cULus - EAC - CCC

MAIN FEATURES

- Integrated output overvoltage protection
- Phase angle, Distributed full cycle or Soft start as switching modes
- Integrated monitoring for SSR and load circuit malfunction

Photoelectric sensors



PD30ET

- World standard housing style 11 x 31.5 x 21 mm
- Supply voltage: DC 4-wire
- Sensing distance: < 15 m
- Output: NPN/PNP NO+NC
- Sensor types: D, B, R, P and T
- Connectivity: Cable or M8 connectors
- Approvals/Marks: CE - cULus - ECOLAB

MAIN FEATURES

- Stainless Steel housing AISI 316L
- Resistant to high-pressure washdown, aggressive cleaning agents and disinfectants.
- IP67, IP68, IP69K, NEMA type 1, 2, 4, 4x, 5, 6, 6P
- Protection: reverse polarity, short circuit and transients

Photoelectric sensors



PD30C

- World standard housing style 10.8 x 30 x 20 mm
- Power supply: 10 to 30 VDC
- NPN or PNP transistor output
- Connection cable or built in M8 connector
- Approvals/Marks: CE - UL 508

MAIN FEATURES

- Distance and output setting by means of teach-button (advanced version PD30CN)
- Back potentiometer for sensitivity adjustment (basic version PD30C)
- Long detecting distances
- Protection: reverse polarity, short circuit and transients

Photoelectric sensors



PA18

- Standard M18 cylindrical housing
- Power supply: 10 to 30 VDC
- Separate models available for NPN or PNP outputs
- Range: 1 m (Axial), 0.8 m (Radial)
- Sensitivity adjustment by potentiometer
- Approvals/Marks: CE - cULus - ECOLAB

MAIN FEATURES

- ECOLAB approved/CE-marking / cULus approved according to UL508
- Diagnostic LED indication (Green and Yellow LED)
- Protection: short-circuit, reverse polarity and overload

Food and Beverage

Our product range

Photoelectric sensors



PH18

- Square sensor with M18 front
- Power supply: 10 to 30 VDC
- Separate models available for NPN or PNP outputs
- Sensing types: Diffuse reflective, BGS, Pol. Retro-reflective, Through beam
- Sensitivity adjusted by potentiometer
- Approvals/Marks: CE - cULus - ECOLAB

MAIN FEATURES

- ECOLAB approved / CE-marking / cULus approved according to UL508
- Diagnostic LED indication (Green and yellow LED)
- Protection: short circuit, reverse polarity and overload

Capacitive sensors



CA18CAN/CAF / CA30CAN/CAF

- Sensing distance: 0.5 - 12 mm (M18), 2 - 30 mm (M30)
- NPN or PNP versions with N.O. and N.C. output
- Dust or temperature alarm output
- Sensing face can withstand temperature up to 120 °C
- Approvals/Marks: CE - cULus - ECOLAB

MAIN FEATURES

- IP69K
- Diagnostic LED indication (Green and yellow LED)
- 4th Generation TRIPLESIELD™

Capacitive sensors



CD50CNF

- Dimensions 50 x 30 x 7 mm
- Supply 10-30 VDC or 5 VDC
- 3-wire DC sensors with open collector NPN or PNP transistor output
- Approvals/Marks: CE

MAIN FEATURES

- Basic capacitive water level sensor
- Detection of excess water in the tank
- Mounting by screws or glued on the outside of any non-metallic tank

Capacitive level sensor



CD34CNF

- Dimensions 8 x 16 x 34 mm
- Power supply: 10 - 30 DC
- Output: NPN / PNP / NO or NC
- Power supply from 208 to 480 VAC (+/- 15%)
- Connectivity: Cable or M8 4-pin Pig-tail
- Approvals/Marks: CE - cULus - ECOLAB

MAIN FEATURES

- Detecting water-based liquids (up to 50 mS)
- Automatic adaption to tank wall thickness
- Eliminating influence from build-up or foam
- IP65, 66, 67, 68, 69K NEMA type 1,2,4,4X,5,12
- Protection: reverse polarity, shortcircuit and transients

Inductive proximity sensors



IA08 / ICS08

- Stainless steel housing M8
- Sensing distance: 1.5 mm to 4 mm
- Power supply: 10 to 30 VDC
- Approvals/Marks: CE - UL - CSA

MAIN FEATURES

- Miniature inductive sensors with short or long housing
- Clear LED-indication for output ON
- Protection: reverse polarity, short-circuit and transients
- 2 kHz operating frequency

Inductive proximity sensors



ICS12 / ICS18 / ICS30

- Standard M12, M18 and M30 cylindrical housing
- Power supply: 10 to 36 VDC
- Sensing distance from 2 mm up to 22 mm
- Housing: stainless steel, IP67, IP68 and IP69K
- Approvals/Marks: CE - cULus - c CSAus

MAIN FEATURES

- ECOLAB approved
- Short-circuit and overload LED indication
- Extended temperature range: -40°C to +80°C
- FDA approved plastic cap

Our product range

Cordsets



CONB14NF / CONB54NF

- M12 and M8 connectors
- Straight and angled versions
- 2 or 5 m cable length
- 4-wire version
- Degree of protection IP69K

MAIN FEATURES

- ECOLAB approved/ UL approved
- Extended Temperature range: -40°C to +105°C
- LED version also available

Level magnetic sensors



ILM/ILSP

- Cylindrical, float diameter 17.5 to 53 mm
- Reversible output function by float overturning
- High temperature versions available up to 120°C
- Degree of protection: IP67 minimum

MAIN FEATURES

- Cylindrical non-toxic polypropylene or stainless steel housing
- Vertical or horizontal mounting
- NO, NC or change-over output function

Safety magnetic sensors



CLS / SMS

- Rectangular or cylindrical housing
- Connection: PVC cable or pigtail solution
- Housing material: Plastic or Stainless steel
- Approvals/Marks: CE - cULus

MAIN FEATURES

- Multiple flux coding
- Several combinations of safety and auxiliary outputs available
- Operating temperature -25° to +70°C

1-phase energy analyzers up to 45A



EM111

- 1 DIN module
- Backlit touch LCD
- Measurement of voltage, current, power, power factor and frequency
- Bi-directional energy metering, 7-digits cl. B (EN50470)
- Measuring inputs: 115/230 VAC, 45 A

MAIN FEATURES

- Self-powered
- Dual tariff management
- Pulse output or RS485 Modbus or M-Bus port
- Sealable terminal covers
- CE - MID (PFA and PFB)

1-phase energy analyzers up to 100A



EM112

- 2 DIN modules
- Backlit touch LCD
- Display backup by supercapacitor
- Measurement of voltage, current, power, power factor and frequency
- Bi-directional energy metering, 8-digits, cl. B (EN50470)
- Measuring inputs: 115/230 VAC, 100 A

MAIN FEATURES

- Self-powered
- Dual tariff management
- Pulse output or RS485 Modbus or M-Bus port
- Sealable terminal covers
- CE - MID (PFA and PFB)

3-phase energy analyzers for direct current up to 65A



EM340

- 3 DIN modules
- Backlit touch LCD
- Measurement of voltage, current, power, power factor and frequency
- Bi-directional energy metering, 3x8-digit, cl. B (EN50470)
- Measuring inputs: 230 to 400 V_{LL} AC, 65 A

MAIN FEATURES

- Self-powered
- Dual tariff management
- Pulse output or RS485 Modbus or M-Bus port
- Sealable terminal covers
- CE - MID (PFA and PFB)

Food and Beverage

Our product range

Multifunction meters



WM14 / WM12

- Dimensions: 6 DIN rail module or 96 x 96 mm panel mounting housings
- 3-phase multifunction indicator (WM12) or analyzer (WM14)
- Accuracy 0.5 % (voltage, current)
- Front protection degree IP65, NEMA4X, NEMA12

MAIN FEATURES

- Available models from a simple indicator up to an advanced analyzer
- Allows the serial re-transmission of the main parameters to a PLC for full control of the system
- Suitable for DIN-rail or panel mounting

3-phase voltage and frequency monitoring relays with NFC



DPD

- Dimensions: 22.5 mm DIN rail mounting enclosure
- 120 VAC to 480 VAC Delta and Star Mains
- Voltage and frequency monitoring
- 2 SPDT 8 A relay outputs
- Approvals/Marks: UL, CSA and CCC

MAIN FEATURES

- NFC programming
- Up to 10 configurable setpoints
- Apps for Android and Windows PC programming

3-phase monitoring relay



DPA52 / DPB52

- Dimensions 81x17.5x67.2 mm DIN-rail housing
- Phase sequence and phase loss (DPA/DPB), Under/Over Voltage (DPB)
- 3-phase AC (own switching power supply)
- Power supply from 208 V_{LL} -40% to 480 V_{LL} +30%
- Approvals/Marks: cULus Listed - CCC approved

MAIN FEATURES

- Motor protection from reverse running and phase loss
- 17.5 mm width. Suitable for NORM panels.
- Plug and play: no settings needed (DPA), easy setup (DPB)

Monitoring relays



DIA53

- Dimensions: 81 x 17.5 x 67.2 mm DIN-rail housing with 12 mm hole for current measurement
- Current monitoring relay with built-in current transformer
- 20, 50 or 100 A full scale
- Self powered
- Approvals/Marks: UL - CSA - CCC

MAIN FEATURES

- 2-wire connection
- Knob adjustable setpoint
- Integrated solid state NPN PNP output

Monitoring relays



DIB71

- Dimensions: 81 x 35.5 x 67.2 mm DINrail housing
- Over or under current monitoring relay 1-phase AC/DC TRMS
- Power supply from 24 to 2380 VAC (\pm 15%)
- Approvals/Marks: UL - CSA - CE approved

MAIN FEATURES

- Solution to simply monitor overload LED indication for relay, alarm and power supply ON
- 35.5 mm wide housing suitable both for both back and front panel mounting

3-phase pumps and ventilators soft starters



RSWT

- Motor rating: Up to 45 kW (90 A)
- 3-phase controlled & internally bypassed
- Operational voltage:
RSWT40: 220 - 400 VAC, RSWT60: 220 - 600 VAC
- PTC input, Alarm - Top of Ramp - Run relay indication
- Approvals/Marks: cULus - CCC - EAC

MAIN FEATURES

- Easy to use and set up
- Self-learning algorithm to improve pump starts/stops
- Integrated overload protection (Class 10)

Our product range

3-phase general purpose soft starters



RSGD

- Operational voltage range: 187 - 440 VAC, 187 - 660 VAC
- Operational current range: 12 AAC up to 100 AAC
- Control voltage: 24 VAC/DC, 110 - 400 VAC
- Auxiliary relays for top of ramp and alarms
- Serial communication (Modbus 2-wire) [RSGD 75 mm models]
- Approvals/Marks: cULus - CCC - EAC

MAIN FEATURES

- Easy to use and set-up
- Self-learning algorithm to adapt to different loads

Soft starters



RSBS / RSBS HP

- Current limit starting
- Advanced diagnostic functions
- Internally bypassed
- Up to 12 starts per hour
- Approvals/Marks: cULus listed

MAIN FEATURES

- Plug and Play: no external settings needed
- Space saving IP20 design
- Integrated starting capacitor
- Optimised algorithm for high pressure starts (RSBS HP)

Timers



HAA08 / HAA14

- 21.5 x 28 mm housing for 8 pin or 14 pin blade socket
- Multifunction timer
- DPDT or 4PDT output
- Universal power supply
- Approvals/Marks: cUR - CSA

MAIN FEATURES

- Front knob adjustable time setting
- Selectable time ranges from 0.1 s to 100 h
- Delay on operate/release, ON/OFF first symmetrical recycle, single/double interval on trigger open/close

Timers



FMB01

- 48 x 48 mm housing for 11 pin socket or panel mounting
- Multifunction timer with 7 functions
- DPDT output
- Universal power supply
- Approvals/Marks: cUR - CSA

MAIN FEATURES

- Front knob adjustable time setting
- Selectable time ranges from 0.05 s to 300 h
- Delay on operate/release, ON/OFF first symmetrical recycle, single/double interval on trigger open/close

Switching power supplies



SPD: DIN rail type 5 W...960 W

- DIN-rail housing
- Short circuit and overload protection
- 1-Phase and 3-phase
- Universal supply voltage AC/DC
- Approvals/Marks: cUL listed - TUV/CE

MAIN FEATURES

- High efficiency
- LED indicator for DC power on
- Parallel versions available
- Active PFC ≥ 90 W
- Class II output ≤ 90 W

Switching power supplies



SPPC: Enclosed type 25 W...800 W

- Compact dimensions
- Universal input voltage range: 85 VAC ~ 264 VAC / 120 VDC ~ 370 VDC (SPPC150F type)
- 105°C long life electrolytic capacitors
- Adjustable output

MAIN FEATURES

- High efficiency and compact size
- DC output: 5, 12, 15, 24 and 48 V
- Built-in active PFC (Power Factor Correction) function: PF >0.98 @ 115 VAC and PF > 0.95 @ 230 VAC (SPPC150F type)

Digital panel meters



UDM / LDM40

- Dimensions: 48 x 96 x 105 mm (UDM40); 48 x 96 x 83 mm (LDM40)
- TRMS AC current and voltage measurements
- AC/DC current measurements: selectable full scales (200 μ A to 5 A)
- AC/DC voltage measurements: selectable full scales (200 mV to 500 V)
- Approvals/Marks: CE - cURus - cCSAus

MAIN FEATURES

- Accuracy class 0.1% reading
- UDM40: °C or °F temperature measurements, resistance measurements, rate, speed, frequency and period measurement

Electromagnetic Safety Interlock



ESI

- Enhancing safety. Ideal for applications that require access to remain closed and locked until potential hazards have stopped or come to a predetermined safe state.
- Protecting machines from interruptions in production
- Standards compliance. SIL 3 (EN 62061), PL e in accordance with EN ISO 13849-1, interlock type 2 in accordance with EN ISO 14119.
- Approvals by IMQ - CE - cULus.

MAIN FEATURES

- Ensure protection in inertia's machineries
- Prevents entry into a dangerous area until the unlock signal
- With manual unlock device for emergency
- Block controlled by solenoid

Food and Beverage

Our product range

CERTUS configurable safety module



CMM

- 4 non-safety test outputs for sensor monitoring
- 2 non-safety programmable digital signal outputs
- 2 non-safety inputs for Start / Restart interlock and EDM
- CMC configurable memory card slot
- LOG file with 5 configuration modifications
- 24 connectors in 22.5 mm
- Connection with other expansion units via rear bus

MAIN FEATURES

- Also usable as a stand-alone device, able to control any other expansion unit
- 8 safety digital inputs
- 2 safety OSSD pairs (400 mA Output)
- Certified to the highest safety levels: SIL 3, SILCL 3, PL_e, Cat. 4, CE, TUV, cULus

CERTUS configurable I/O expansion modules



C I/O

- Wide range of Input/Output, Input only or Output only (both OSSD and standard relay) expansion units to serve different application requirements
- Models offer a variety of non-safety Inputs/Outputs such as: inputs for Start/Restart interlock and EDM, test outputs

MAIN FEATURES

- The models offer eight combinations:
 - 8 Inputs 2 Outputs; 12 Inputs 8 test Outputs
 - 8 Inputs, 16 Inputs,
 - 2 OSSD, 4 OSSD
 - 2 relay Outputs, 4 relay Outputs

CERTUS data and diagnostic modules + bus transfer



DDC + CBT

- DDC: Expansion unit for Diagnostics and Data Comm.:
 - C PFBUS - Profibus DP, - C DNET - DeviceNET
 - C CAN - CANOpen, - C EIP - Ethernet IP
 - C ECAT - EtherCAT, - C PFNET - PROFINET
 - C OMMS - Universal Serial Bus
- Bus Transfer: interface module allowing the connection of remote expansions via bus
- DDC: allows communication with most common industrial fieldbus systems

MAIN FEATURES

- Bus transfer: up to 100 m for each connection. Maximum 5 CBT expansions. Ideal solution for the interconnection of the safety functions of several machines in a production line

CERTUS Speed monitoring modules



CES

- Expansion units to monitor speed (Ple):
 - Zero speed
 - Max speed
 - Speed range
 - Motion direction; rotation / translation.
- RJ45 for encoder connections and terminal blocks for connection of proximity (up to 2 proximity switches per module).
- Inputs frequency: Encoder up to 500 KHz (300 KHz for HTL), Proximity up to 5 KHz.

MAIN FEATURES

- The modules allow to configure up to 4 speed thresholds for each logic output (axis)
- Each module integrates two logic outputs configurable via the MSD and is capable to control up to two independent axes

Certus multifunction safety module



CM22D0A / CM40D0A / CM30D1A

- Compact dimension, 1 DIN, W x H x D: 18 x 90 x 63 mm.
- Safety solution for basic machines, equipment and production lines
- 4 LEDs on the front panel indicate the status and any errors during operation
- Up to 4 OSSD safety outputs
- Can be used in application with: e-stop, e-gate, limit switch, non-contact switch, safety light curtains, safety light beam, safety mat

MAIN FEATURES

- Selectable delay time
- Cat. 4 Ple (ISO 13849-1), SIL 3 (IEC 62061), SILCL 3 (IEC 61508)
- 2 OSSD auxiliary outputs
- Manual or automatic start selectable
- Approval by TUV

Safety modules



NES02D / NES13D / NLG

- Safety modules for gate and emergency stop (NE) and light curtain (NL)
- 2 NO / 3 NO safety Outputs
- IP40 protection for housing and IP20 protection for terminals
- Approvals/Marks: CE - cULus

MAIN FEATURES

- Safety category 4
- < 30 ms response time
- Performance Level PL: e in accordance with ISO 13849-1
- Safety Integrity Level SILCL:3 in accordance with IEC 62061



OUR SALES NETWORK IN EUROPE

AUSTRIA

Carlo Gavazzi GmbH
Ketzergrasse 374,
A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlogavazzi.at

FRANCE

Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle Etoile,
F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlogavazzi.fr

ITALY

Carlo Gavazzi SpA
Via Milano 13,
I-20020 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

SPAIN

Carlo Gavazzi SA
Avda. Iparragirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 431 6081
gavazzi@gavazzi.es

BELGIUM

Carlo Gavazzi NV/SA
Mechelsesteenweg 311,
B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlogavazzi.be

GERMANY

Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

NETHERLANDS

Carlo Gavazzi BV
Wijkermeerweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlogavazzi.nl

SWEDEN

Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlogavazzi.se

DENMARK

Carlo Gavazzi Handel A/S
Over Hadstenvej 40,
DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

GREAT BRITAIN

Carlo Gavazzi UK Ltd
4.4 Frimley Business Park,
Frimley, Camberley, Surrey GU16 7SG
Tel: +44 1 276 854 110
Fax: +44 1 276 682 140
sales@carlogavazzi.co.uk

NORWAY

Carlo Gavazzi AS
Melkeveien 13,
N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
post@gavazzi.no

SWITZERLAND

Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 3,
CH-6312 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlogavazzi.ch

FINLAND

Carlo Gavazzi OY AB
Ahventie, 4 B
FI-02170 Espoo
Tel: +358 9 756 2000
myynti@gavazzi.fi

PORTUGAL

Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlogavazzi@carlogavazzi.pt

OUR SALES NETWORK IN THE AMERICAS

USA

Carlo Gavazzi Inc.
750 Hastings Lane,
Buffalo Grove, IL 60089, USA
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlogavazzi.com

CANADA

Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
Mississauga, ON L5N 6M6, Canada
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlogavazzi.com

MEXICO

Carlo Gavazzi Mexico S.A. de C.V.
Calle La Montaña no. 28, Fracc. Los Pastores
Nauclan de Juárez, EDOMEX CP 53340
Tel & Fax: +52.55.5373.7042
mexicosales@carlogavazzi.com

BRAZIL

Carlo Gavazzi Automação Ltda.Av.
Francisco Matarazzo, 1752
Conj 2108 - Barra Funda - São Paulo/SP
Tel: +55 11 3052 0832
Fax: +55 11 3057 1753
info@carlogavazzi.com.br

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.
61 Tai Seng Avenue #05-06
Print Media Hub @ Paya Lebar iPark
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980
info@carlogavazzi.com.sg

MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dana 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399
sales@gavazzi-asia.com

CHINA

Carlo Gavazzi Automation
(China) Co. Ltd.
Unit 2308, 23/F.,
News Building, Block 1, 1002
Middle Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300
sales@carlogavazzi.cn

HONG KONG

Carlo Gavazzi Automation
Hong Kong Ltd.
Unit 3 12/F Crown Industrial Bldg.,
106 How Ming St., Kwun Tong,
Kowloon, Hong Kong
Tel: +852 23041228
Fax: +852 23443689

OUR COMPETENCE CENTRES AND PRODUCTION SITES

DENMARK

Carlo Gavazzi Industri A/S
Hadsten

MALTA

Carlo Gavazzi Ltd
Zejtun

ITALY

Carlo Gavazzi Controls SpA
Belluno

LITHUANIA

Uab Carlo Gavazzi Industri Kaunas
Kaunas

CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.
Kunshan

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20020 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



CARLO GAVAZZI
Automation Components

Energy to Components!

www.gavazziautomation.com

